STOVAX

Fire Your Imagination



Traditional and Contemporary

WOOD AND MULTI-FUEL STOVES



Premium Quality Cast Iron & Steel Stoves

Welcome to Stovax, a company that has been dedicated to the development and manufacture of high quality, woodburning and multi-fuel stoves for over 35 years. Today, Stovax is home to one of Europe's leading ranges of stoves and fireplaces with models and colours to suit all types of interiors.

Authentic choice

There is nothing like the irresistible ambience of a real Stovax stove. Expertly crafted to be either traditional or contemporary in appearance with the flexibility and convenience required for modern living, they continue to offer discerning homeowners the best of all worlds. Whether you choose woodburning or smokeless fuel options they are clean burning, highly efficient and available in sizes and styles to suit most rooms and living spaces.

Cast iron or steel

Originally, all heating stoves, such as the Huntingdon range (illustrated on pages 14 - 23), were made from cast iron. Today, in spite of commercial steel production expanding from the late 19th Century onwards, cast iron remains the material of choice for many premium quality stoves. This is because of the way cast iron diffuses warmth giving maximum radiant heat over a period of time. Moreover, the iron can be cast more thickly in areas where greater strength is needed, whilst also allowing attractive designs to be cast into the stove panels.

However, in the 21st Century, modern manufacturing technology also permits the use of heavy gauge steel for the body of the stove with cast iron or steel doors and firebox components complementing it.

Accordingly, both the more traditional Stockton and Riva Plus ranges (see pages 30 - 67) and the contemporary Vogue, View & Vision ranges (see pages 72 - 107) combine the advantage of both cast iron and steel, offering superb performance and value for money.

State-of-the-art Cleanburn technology

Most stoves in this brochure feature Cleanburn technology so they burn logs or solid fuels with outstanding efficiency*, resulting in more heat delivery into the room and less going up the chimney. It works by introducing pre-heated, secondary air into the firebox to burn the excess hydrocarbons in the smoke. Airwash air also helps keep the window clean, allowing you to enjoy the flames to the full.

CE Marked and HETAS Accredited

All Stovax stoves in this brochure are CE marked, and this is shown by the CE mark on their product pages. This means they have been independently tested to exacting European standards for both heating efficiency and emissions. They have also been accredited by HETAS[†], the UK's official body recognised by the government to approve solid fuel domestic heating appliances.

[†] High Output Boiler Stoves are subject to official listing.













Contents

| CAST IRON STOVES |)6 – (| |
|-------------------------------|-------------------|---|
| Brunel Stoves |)8 – ⁻ | |
| Huntingdon Stoves1 | 4 – 2 | |
| Regency Stoves2 | | |
| STEEL STOVES2 | 26 – 2 | |
| Stockton 3, 4 & 5 | 30 – C | |
| Stockton Milner | 38 – 3 | |
| Stockton 6, 7 & 8 | 10 – E | |
| Stockton 11 & 145 | | |
| Stockton Double Sided Stoves5 | 58 – 5 | |
| Riva Plus Stoves | 50 – 1 | 6 |

| CONTEMPORARY STOVES | 58 – 71 |
|--------------------------------------|---------|
| Vogue Stoves | |
| View Stoves | B2 – 97 |
| Vision Stoves98 | |
| Freestanding Fires108 | |
| Built-In Flres | |
| HIGH OUTPUT BOILER STOVES 112 | |
| Electric Stoves118 | 8 – 119 |
| Flue Pipe120 | |
| Accessories, Stove Care & Benches122 | |
| Dimensions & Flue Pipe124 | |

Woodburning and solid fuel

All Stovax stoves are designed either for multi-fuel use, which means they burn logs, smokeless fuels or peat/turf briquettes, or as woodburners only.

Multi-fuel stoves have a riddling grate which allows ash to be riddled into a built-in ashpan to create the optimum conditions for efficient combustion. Woodburners have a fixed grate and no ashpan, since wood burns best on a bed of ashes.

Wood is better in environmental terms as the amount of carbon dioxide released into the atmosphere is approximately the same as that absorbed by the tree during growth. It is also a renewable resource, particularly when derived from plantations and cultivated woodland. For optimum results, we recommend logs should be seasoned for 2 years or more to achieve a



moisture content below 20%*. This will not only give a higher output than that of freshly felled timber but help avoid a build up of tar in your flue. Furthermore, if you can obtain hardwood logs this is better still, as they will have a greatly increased calorific value of softwoods for the same volume.

* All efficiencies quoted in this brochure are when tested to European standards for seasoned wood with a moisture content of less than 20% or for approved smokeless fuels

In rural areas, Stovax stoves have a particular advantage as they allow homeowners to burn readily available log supplies from local sources. Indeed, if you are a farmer, smallholder or landowner your fuel could even be free!

Woodburning efficiency can even be achieved in the most urban environments with our extensive range of Smoke Control Area approved stoves. Please see page 5 for further details.

Just as importantly, if you choose a Stovax stove with a boiler option, you can even provide yourself with domestic hot water or run radiators from the same fire. Please see page 4 for further details.

Five Year Extended Warranty

As outlined on page 122, your Stovax Expert Retailer will provide you with a Two Year Warranty for your new solid fuel stove. This can then be extended to a Five Year Warranty provided your stove is registered with Stovax. Please note, this warranty excludes certain consumable parts. Stoves purchased outside



of Stovax's Expert Retailer Network will carry a standard 12 month, non-extendable warranty. Full warranty terms & conditions are available to view at **www.stovax.com**









Stovax boiler stoves for complete home heating

Four models within the Stockton range, along with two contemporary View models, have been specifically designed to supply your domestic hot water and central heating requirements or even augment your existing heating system.

Hot water, radiators and underfloor heating

Stovax offer a selection of Multi-fuel and Woodburning High-output Boiler models that come with the boiler built in.

If you choose a stove with an integral High-output Boiler, you can not only supply yourself with domestic hot water but even run your radiators all from the same appliance.

Alternatively, you can 'link up' a Stovax boiler stove with your conventional oil or gas fuelled central heating system. This 'link up' system will not only reduce reliance on your heating being provided from a single fuel source but, if burning wood, will also make your heating better for our environment through lower carbon emissions. 'Link up' can also connect with gas or oil, sealed heating systems, combi's, underfloor heating, advanced electronic controls and solar panels to make even more flexible systems.

Further information about stoves with boilers is given on pages 112 - 117. Stovax also produces a 'link up' guide which shows how to 'link up' your solid fuel boiler with other heat sources, providing examples of typical arrangements and frequently asked questions. For more details, see our link up technology guide at www.stovax.com/linkup.











Clean Air Act compliance

Approved for Smoke Control Areas

Most town and city homes are located in Smoke Control Areas as designated by the Clean Air Act 1993. To burn logs on a stove in these locations, the model installed must have been granted exemption from the regulations by the government through DEFRA.

This exemption is given only to appliances which have been independently tested to demonstrate particularly clean burning combustion. Many stoves in this brochure are approved for use in Smoke Control Areas (when the appropriate smoke control kit is fitted and used in accordance with the product operating instructions) and this is shown on each product page. Your Stovax retailer can give you further help and advice.



Expert Retailer Network

See our stoves in your area

We take great care to ensure that our stoves are designed, tested and manufactured to the highest possible quality and safety standards. We are just as concerned to make certain that they are sold and installed correctly so that you enjoy years of pleasure from your purchase.

Accordingly, you will find our products are only available from experienced, independent retailers who will be happy to show you a selection of models locally in their showrooms, often fully operational. These independent retailers will discuss your individual requirements both technical (such as sizing the heat output to your room and advising on your flue type) and design, and ensure that you select the most appropriate product for your home. They will also be able to advise on, or assist with, the installation process as well as help provide any after-sales support and servicing your appliance may require in the future.

Whilst we encourage our retailers to promote fireplace products and their outlets via the internet, we do not believe suitable levels of customer care and satisfaction can be obtained from purchasing the product only online and we would strongly recommend that you consider this when undertaking your research and making a purchasing decision. Furthermore, please be aware that we do not offer technical support (beyond our statutory responsibilities) to products bought via nationwide online sales, where this support would normally be offered by one of our qualified, independent retailers.

In addition, Stovax stoves purchased from within our Expert Retailer Network will have the additional benefit of an extended warranty period, subject to terms and conditions. Full details can be found at www.stovax.com.









Cast Iron Stoves

Wood and Multi-fuel

Every stove in this section is manufactured from cast iron. This is the traditional way of making premium quality stoves due to the way cast iron diffuses heat. Another advantage is that the iron can be cast more thickly in areas where greater strength is needed. It also has sculptural qualities, allowing attractive designs to be cast into the stove panels.

Airtight Construction

All Stovax stove doors, except the Regency, have airtight seals which permit airflows to be precisely controlled. This allows both the heat output and refuelling frequency to be varied and helps maximise burning efficiency.

Perfect Flame Control

The triple air system in certain stoves also allows complete control of the flame picture. From a deep glow, with minimal flames, it takes only a few seconds to fill the firebox with swirling flames from the fuel and jets of flames from the Cleanburn ports.

Enamel Stoves

Enamel is a very thin coating of coloured glass which is fired at over 800°C on to a metal surface. To achieve its translucent and lustrous finish, each casting is especially designed for enamelling and is coated and fired twice. Enamel is an option on many stoves, and available in the three colours shown opposite.









Colour Options





Blue Enamel



Laurel Green Enamel



lvory Enamel

Please see product pages for colour options available for each model.

Triple Air Systems (Cleanburn technology)

Several Stovax stoves incorporate triple air systems to provide a cleaner burn, greater thermal efficiency and control of the flame picture as follows:

- 1 Airwash air is drawn down over the inside of the window to keep the glass clean and clear. It is also used as primary combustion air when burning wood.
- Primary air for use with solid fuel, also used to start wood fires but not normally used once a wood fire is burning.
- 3 Cleanburn secondary air is pre-heated as it passes through a heat exchanger chamber within the firebox. It is then drawn into the smokestream, where it combusts unburnt hydrocarbons to provide a cleaner burn and greater thermal efficiency.



















Brunel 1A

Ideal for smaller rooms, the Brunel 1A is the smallest stove in the Stovax cast iron range and is designed to fit into a standard 22" high British fireplace. Nonetheless, this model still features airwash to help keep the glass window clear, full multi-fuel capability and an externally operated riddling grate.

Key Facts

| High efficiency | up to 84% |
|-------------------------------------|----------------------------|
| Multi-fuel (with external riddling) | ✓ |
| Ashpan | ✓ |
| Airwash | ✓ |
| Nominal heat output and range | 4kW (2 - 6kW) |
| Maximum log length | 9 ^{3/4} " (250mm) |
| Room vent not normally required* | ✓ |
| Longer leg option (175mm) | ✓ |
| Flue outlet | 5" top or rear |
| Matching flue pipe in four colours | ✓ |

^{*}For more information on room vents, please see page 122

| Colour | Matt Black | Midnight Blue Enamel | Laurel Green Enamel | lvory Enamel |
|------------|-----------------|-------------------------|------------------------|-----------------|
| Multi-fuel | 7008 | 7008BL | 7008LG | 7008IV |
| Ash Caddy | 4227 all models | | | |











Midnight Blue Enamel

Laurel Green Enamel

lvory Enamel













Brunel 2CB

The Brunel 2CB will bring you extra heating efficiency and economy with the use of the Stovax Cleanburn System. In fact, this neat little stove incorporates all the state-of-the-art features you would expect from Stovax's advanced designs. For example, the stainless steel baffle warms up more quickly than cast iron so it starts working more rapidly, setting new standards in performance.

Key Facts

| High efficiency | up to 79% |
|---|----------------|
| Multi-fuel (with external riddling) | ✓ |
| Ashpan | ✓ |
| Cleanburn (with stainless steel heat exchanger) | √ |
| Airwash | ✓ |
| Nominal heat output and range | 6kW (3 - 8kW) |
| Maximum log length | 13" (330mm) |
| Longer leg option (175mm) | √ |
| Flue outlet | 5" top or rear |
| Matching flue pipe in three colours | ✓ |

| Colour | Matt Black | Laurel Green Enamel | lvory Enamel |
|------------|---------------|------------------------|-----------------|
| Multi-fuel | 7051 | 7051LG | 7051IV |
| Ash Caddy | | 4227 all models | |








Laurel Green Iv Enamel E

lvory Enamel







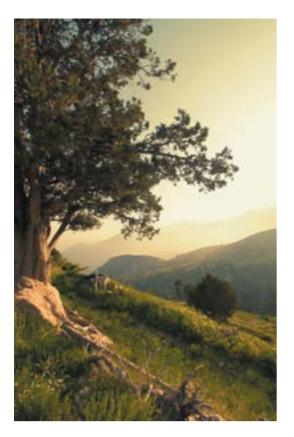



Brunel 3CB

The largest stove in the Brunel range, the 3CB has an extensive window through which you can enjoy the swirling flames of the Stovax Cleanburn System. Again, this stove incorporates all of Stovax's state-of-the-art technical features such as the stainless steel baffle. Furthermore, with full multi-fuel capability and external riddling, the Brunel 3CB generates up to 7kW of heat for you to enjoy.

Key Facts

| High efficiency | up to 83% |
|---|-----------------------------|
| Multi-fuel (with external riddling) | ✓ |
| Ashpan | ✓ |
| Cleanburn (with stainless steel heat exchanger) | ✓ |
| Airwash | ✓ |
| Nominal heat output and range | 7kW (3.5 - 9kW) |
| Maximum log length | 15 ^{3/4} " (400mm) |
| Longer leg option (250mm) | √ |
| Boiler option | Х |
| Flue outlet | 6" top or rear |
| Matching flue pipe in two colours | ✓ |
| | |

| Colour | Matt Black | Laurel Green Enamel |
|------------|---------------|------------------------|
| Multi-fuel | 7053 | 7053LG |
| Ash Caddy | 4228 a | all models |





Matt Black

Laurel Green Enamel











It may be the smallest stove in the Huntingdon range, but the Huntingdon 25 provides virtually all the features of larger models and is specially designed to suit everything from a country cottage to a modern townhouse. Ideal for burning logs, yet equally proficient with smokeless fuels or peat briquettes, the compact Huntingdon 25 is just the stove to bring you a picture of comfort this winter.

Key Facts

| High efficiency | up to 78% |
|---|----------------------------|
| Multi-fuel (with external riddling) | ✓ |
| Approved for Smoke Control Areas* | ✓ |
| Tracery or clear door versions (matt black) | ✓ |
| Ashpan | ✓ |
| Airwash | ✓ |
| Nominal heat output and range | 4.9kW (3 - 7kW) |
| Maximum log length | 9 ^{3/4} " (250mm) |
| Room vent not normally required** | ✓ |
| Boiler option | Х |
| Flue outlet | 5" top or rear |
| Matching flue pipe in three colours | 1 |

^{*} When fitted with a Smoke Control Kit.

| Matt Black | Midnight Blue Enamel | Laurel Green Enamel |
|---------------|-------------------------|--|
| 7058 | 7058BL | 7058LG |
| 7057 | - | - |
| | 4227 all models | |
| H25SCKIT | | |
| | Black 7058 | Black Blue Enamel 7058 7058BL 7057 - 4227 all models |







Matt Black

Midnight Laurel Green Blue Enamel Enamel





^{**}For more information on room vents, please see page 122





With Gothic door mouldings complemented by reeded side panels, the Huntingdon 28 is an elegant piece of furniture in its own right. The very latest advances in stove design technology allow you to enjoy the movement of the flames to the full; especially as you can precisely adjust the flame picture via dual air controls.

Key Facts

| High efficiency | up to 82% |
|---|----------------|
| Multi-fuel (with external riddling) | ✓ |
| Tracery or clear door versions (matt black) | ✓ |
| Ashpan | ✓ |
| Cleanburn | ✓ |
| Airwash | √ |
| Concealed handles & hinges | √ |
| Nominal heat output and range | 6kW (3 - 8kW) |
| Maximum log length | 12" (300mm) |
| Boiler option | X |
| Flue outlet | 5" top or rear |
| Matching flue pipe in four colours | ✓ |

| Colour | Black | Blue Enamel | Green Enamel | Enamel |
|---------------------------|-----------------|-------------|--------------|--------|
| Multi-fuel - tracery door | 7065 | 7065BL | 7065LG | 7065IV |
| Multi-fuel - clear door | 7064 | - | - | - |
| Ash Caddy | 4227 all models | | | |







Matt Black Midn

ght Laurel Green Enamel Enamel

lvory















The Huntingdon 30 combines refined styling with significant heating capacity, making it the ideal choice for many homes. Dual air levers allow you to control the level of flames and heat output to suit your needs, providing exacting control of combustion whilst there is also an external riddling feature to aid the efficient burning of smokeless fuels.

Key Facts

| High efficiency | up to 82% |
|---|----------------|
| Multi-fuel (with external riddling) | ✓ |
| Tracery or clear door versions (matt black) | ✓ |
| Ashpan | ✓ |
| Cleanburn | √ |
| Airwash | ✓ |
| Concealed handles & hinges | ✓ |
| Nominal heat output and range | 6kW (3 - 8kW) |
| Maximum log length | 12" (300mm) |
| Boiler option | × |
| Flue outlet | 6" top or rear |
| Matching flue pipe in four colours | ✓ |
| | |

| Colour | Matt Black | Midnight Blue Enamel | Laurel Green Enamel | lvory Enamel |
|---------------------------|---------------|-------------------------|------------------------|-----------------|
| Multi-fuel - tracery door | 7055 | 7055BL | 7055LG | 7055IV |
| Multi-fuel - clear door | 7054 | - | - | - |
| Ash Caddy | | 4227 | all models | |









Matt Black

Midnight Blue Enamel

Laurel Greei

lvory









Available in individual woodburning and multi-fuel versions, the clean, graceful lines of the Huntingdon 35 make this classic design look attractive even when it is not alight. The woodburning version has a solid cast iron base and no ashpan, as wood burns more efficiently on a bed of ash. The multi-fuel version also incorporates external riddling and dual air controls for accurate regulation of the flames and combustion.

Key Facts

| High efficiency | up to 82% |
|---|-----------------|
| Wood version | √ |
| Multi-fuel (with external riddling) | ✓ |
| Tracery or clear door versions (matt black) | ✓ |
| Ashpan | ✓ |
| Cleanburn | ✓ |
| Airwash | ✓ |
| Concealed handles & hinges | ✓ |
| Nominal heat output and range | 7kW (3.5 - 9kW) |
| Maximum log length | 14" (350mm) |
| Shorter leg option | ✓ |
| Boiler option | Х |
| Flue outlet | 6" top or rear |
| Matching flue pipe in four colours | ✓ |

Product Codes

| Colour | Black | Blue Enamel | Enamel | Enamel |
|---------------------------|-------|-------------|---------|---------|
| Wood - tracery door | 7063 | - | - | - |
| Multi-fuel - tracery door | 7061 | 7061BL | 7061LG | 7061IV |
| Multi-fuel - clear door | 7060 | - | - | - |
| Short legs (set of 4) | 7090S | 7090BLS | 7090LGS | 7090IVS |
| Ash Caddy | | 4227 all | models | |





Blue Enamel





Matt Black Midnight

Laurel Green Enamel

lvory Enamel













The biggest model in the Huntingdon range – and the most powerful. With up to 9kW of heat output, the 40 is equally at home in both traditional inglenook and modern fireplace settings. You can choose from either the woodburning version with flat cast iron base plate or the multi-fuel version with external riddling and concealed ashpan. Also, do not forget to opt for matching flue pipe, particularly when installing your stove in an inglenook.

Key Facts

| High efficiency | up to 88% |
|---|-----------------------------|
| Wood version | 1 |
| Multi-fuel (with external riddling) | ✓ |
| Tracery or clear door versions (matt black) | 1 |
| Ashpan | 1 |
| Cleanburn | 1 |
| Airwash | 1 |
| Concealed handles & hinges | 1 |
| Nominal heat output and range | 9kW (4 - 11kW) |
| Maximum log length | 15 ^{3/4} " (400mm) |
| Shorter leg option | 1 |
| Flue outlet | 6" top or rear |
| Matching flue pipe in three colours | ✓ |

| Colour | Matt Black | Midnight Blue Enamel | Laurel Green Enamel | |
|---------------------------|-----------------|-------------------------|------------------------|--|
| Wood - tracery door | 7069 | - | - | |
| Multi-fuel - tracery door | 7075 | 7075BL | 7075LG | |
| Multi-fuel - clear door | 7074 | - | - | |
| Short legs (set of 4) | 7090S | 7090BLS | 7090LGS | |
| Ash Caddy | 4227 all models | | | |







Matt Black

Midnight Blue Enamel

Laurel Green Enamel













Regency

Originally patented in 1742 by Benjamin Franklin, the Regency enjoys a pedigree unmatched by any other stove. It was designed at a time when America was still a British colony and its proportions were undoubtedly influenced by Franklin's extended visits to Georgian London. Functioning like an open fire with its large firebox, the Regency forgoes adjustable heat output. The stove can be burnt with the doors closed or open for the traditional fireplace atmosphere.

A pair of polished brass balls are supplied with each stove and a brass rail set is available as an optional accessory. Cast into the side panel of every Regency is a support bracket into which an optional barbecue or bean pot may be fixed.



Medium Regency with doors closed

Key Facts

| Size | Medium | | |
|------------------|----------------|--|--|
| Multi-fuel | √ | | |
| Ashpan | ✓ | | |
| Max. heat output | 8kW | | |
| Max. log length | 19" (480mm) | | |
| Flue outlet | 8" top or rear | | |

| Size | Medium |
|----------------|--------|
| Multi-fuel | 1001 |
| Brass Rail Set | 3012 |
| Barbecue Grill | 1009 |
| Bean pot | 3030 |
| Firescreen | 3008 |
| Ash Caddy | 4230 |
| | |



Matt Black







Steel Stoves

HIGH EFFICIENCY

Wood and Multi-fuel

Combining cast iron for the airtight doors and main firebox components with heavy gauge steel for the body, the Stockton and Riva Plus stoves benefit from both materials with enhanced performance and combustion control as well as value for money. Stovax's triple air systems also provide powerful and swift control over the heat output as well as outstanding views of the flames.



Stockton Stoves - pages 30 - 59

With eight sizes, each available in four colours, and some models having a further choice of door styles and canopies, there is a Stockton stove to suit any home. Furthermore, there are inset, double sided and even boiler versions, so whether traditional or modern, large or small, in country or town, burning wood or solid fuel, you should find a Stockton to match your setting.

Riva Plus Stoves - pages 60 - 67

The versatile Riva Plus range comes in a choice of four sizes offering heat output from two to 11kW. Available as either woodburners or with the capability to burn smokeless fuel, the range can be personalised with the addition of a low or high canopy as well as removable window crosses for all but the smallest size. The Riva Plus also benefits from a boost setting for lighting and refuelling as well as other innovative design and performance features.







Stockton Colour Options



Matt Black



Metallic Blue



Metallic Brown Metallic Green



Riva Plus Colour Options



Matt Black



Steel Contemporary Stoves

- pages 68 - 107

In addition to Stovax's traditional steel stoves there is also a large range of contemporary models such as the striking Vision, View and Vogue Midi stoves.

State of the art functionality is combined with contemporary styling creating a striking centrepiece at the very heart of your home.



View 5







Stunning flame effects due to Cleanburn technology

The triple air systems incorporated in Stockton and Riva Plus stoves combine to provide superb flame control and exceptional views of the fire, so you can also create different ambiences to suit your mood. From a deep glow with minimal flames, it takes only a few seconds to fill the firebox with swirling flames.





Riva Plus Design Features

- 1 Heavy duty steel body.
- 2 Airtight cast iron door.
- 3 Stainless steel baffle.
- **4** Heated air jets from cleanburn ports burn hydrocarbons in smoke.
- **5** Single lever for control of cleanburn combustion and airwash system.
- 6 Firebrick lining.
- 7 Top or rear flue exit connecting stove to flue pipe.
- 8 Removable tool to operate door handle.
- **9** Removable 'window crosses' for clear window.
- **10** Integrated Warm Air Convection System, with Fan assisted option available.
- 11 Optional external air facility for draught reduction.
- **12** Optional Smoke Control Kit available on most models (not illustrated).
- 13 Low and high canopy options (not illustrated).

Steel Stoves









Stockton Design Features

- 1 5mm heavy duty steel body.
- 2 Cast iron airtight door with primary air control slider.
- 3 Cast iron fireback incorporating heat exchanger for Cleanburn system.
- 4 Heated air jets from Cleanburn ports burn hydrocarbons in smoke.
- **5** Airwash control slider to maintain a cleaner glass window including a boost setting on the Stockton range.
- 6 Riddling (multi-fuel versions).
- 7 Top or rear flue exit connecting to stove flue pipe.
- 8 Firebrick lining.
- **9** Adjustable secondary air on Stockton stoves, giving greater control when burning different fuel types.
- 10 The Stockton has a retaining lip on the pan design to increase ash reduction and a runner system to ensure smooth removal and replacement when emptying.
- **11** The solid plate log guard on woodburning Stockton models prevents ash spillage (not illustrated).
- 12 Specially developed, integral boiler versions available (see pages 112 115)
- 13 Stockton Universal tool (see right).
- **14** Optional smoke control kit (not illustrated) available on most models to allow them to be used in smoke control areas.



Stockton Universal Tool







This fits over the stove handle to provide additional leverage and easier usage when the handle is hot as well as ash pan lifting and stove riddling on Stockton models.







Stockton 3

The mini stove of the Stockton range is specifically designed to fit neatly into a standard 22" (560mm) high x 16" (405mm) wide British fireplace opening with the chairbrick removed. It has full multi-fuel capability and its compact dimensions make this stove equally suitable for houseboats, summerhouses and garden workshops.

Key Facts

| High efficiency | up to 86% |
|-------------------------------------|----------------------------|
| Multi-fuel (with external riddling) | ✓ |
| Approved for Smoke Control Areas* | ✓ |
| Cleanburn | ✓ |
| Airwash | ✓ |
| Flat top | ✓ |
| Nominal heat output and range | 3.75kW (2 - 5kW) |
| Maximum log length | 7 ^{7/8} " (200mm) |
| Room vent not normally required** | ✓ |
| Boiler option | Х |
| Flue outlet | 5" top or rear |
| Choice of four colours | 1 |

^{*} When fitted with a Smoke Control Kit.

^{**}For more information on room vents, please see page 122







| Colour | Matt Black | Metallic Blue | Metallic Brown | Metallic Green |
|-------------------|-------------------|------------------|-------------------|-------------------|
| Multi-fuel | ST3MF1 | ST3MF1BL | ST3MF1BR | ST3MF1GR |
| Sparkguard | 7223 all models | | | |
| Ash Caddy | 4227 all models | | | |
| Smoke Control Kit | SZKIT3 all models | | | |
| Heat Shield Kit | ST3HSK all models | | | |









ic Me











Stockton 4

Available in both woodburning and multi-fuel versions, the Stockton 4 is one of our most popular models. With its slim, vertical alignment it is ideally suited to smaller rooms and will complement a traditionally styled or contemporary interior. Choose from a range of four colours to further personalise your stove to your interior décor.

| Key Facts | |
|-------------------------------------|----------------------------|
| High efficiency | up to 85% |
| Multi-fuel (with external riddling) | ✓ |
| Wood | ✓ |
| Approved for Smoke Control Areas* | ✓ |
| Cleanburn | ✓ |
| Airwash | ✓ |
| Flat top | ✓ |
| Nominal heat output and range | 4kW (2 - 6kW) |
| Maximum log length | 7 ^{7/8} " (200mm) |
| Room vent not normally required** | ✓ |
| Boiler option | X |
| Flue outlet | 5" top or rear |
| Choice of four colours | ✓ |
| | |

^{*} When fitted with a Smoke Control Kit.

| Colour | Black | Blue | Brown | Green | |
|--------------------|-------------------|-------------------|----------|----------|--|
| Wood version | ST4W1 | ST4W1BL | ST4W1BR | ST4W1GR | |
| Multi-fuel version | ST4MF1 | ST4MF1BL | ST4MF1BR | ST4MF1GR | |
| Wood kit | | WDKIT4 all models | | | |
| Sparkguard | | 7224 all models | | | |
| Ash Caddy | | 4227 all models | | | |
| Smoke Control Kit | | SZKIT3 all models | | | |
| Heat Shield Kit | ST4HSK all models | | | | |









Metallic

Metallic







^{**}For more information on room vents, please see page 122







Matt



Stockton 5

The Stockton 5 offers you a squarer landscape style compared to the portrait style of the Stockton 3 or Stockton 4, and is available as either a woodburning stove or as a multi-fuel model with external riddling. The additional width allows you to load logs up to 13" (330mm) in length. Both the woodburning and multi-fuel versions are available with a low canopy.

Key Facts up to 85% High efficiency Multi-fuel (with external riddling) Wood ST5W1, ST5WLC1, Approved for Smoke Control Areas* ST5MF1 Cleanburn Airwash Flat top version / Low canopy version Nominal heat output and range 4.9kW (2.5 - 7kW) 13" (330mm) Maximum log length Room vent not normally required** Boiler option X Flue outlet 5" top or rear Choice of four colours

- * When fitted with a Smoke Control Kit.
- **For more information on room vents, please see page 122







Product Codes

| Colour | Black | Blue | Brown | Green | |
|-----------------------------------|-------------------------------|------------|------------|------------|--|
| Wood - flat top | ST5W1 | ST5W1BL | ST5W1BR | ST5W1GR | |
| Wood - low canopy | ST5WLC1 | ST5WLC1BL | ST5WLC1BR | ST5WLC1GR | |
| Multi-fuel kit | MFKIT5 | MFKIT5 | MFKIT5 | MFKIT5 | |
| Multi-fuel - flat top | ST5MF1 | ST5MF1BL | ST5MF1BR | ST5MF1GR | |
| Multi-fuel - low canopy | ST5MFLC1 | ST5MFLC1BL | ST5MFLC1BR | ST5MFLC1GR | |
| Wood kit | WDKIT5 all models | | | | |
| Ash Caddy | 4227 all models | | | | |
| Sparkguard | 7225 all models | | | | |
| MF [†] Smoke Control Kit | SZKIT5MF flat top models only | | | | |
| WB [†] Smoke Control Kit | SZKIT5 all models | | | | |
| Heat Shield Kit | ST5HSK all models | | | | |
| | | | | | |

Motallic

Motallic

Motallic

†MF - Multi-fuel models †WB - Woodburning models









Metallic Blue

Rrown

Metallic Green

See page 28 for additional image.









Stockton 5 Midline

As an alternative to the standard Stockton 5, you can choose the Midline version. This design offers a more integrated, look that is particularly suited to modern interiors yet still provides all the benefits of the original model.

Key Facts

| High efficiency | up to 85% |
|-------------------------------------|-------------------|
| Multi-fuel (with external riddling) | ✓ |
| Approved for Smoke Control Areas* | ✓ |
| Cleanburn | ✓ |
| Airwash | ✓ |
| Flat top | ✓ |
| Nominal heat output and range | 4.9kW (2.5 - 7kW) |
| Maximum log length | 13" (330mm) |
| maran rog rongar | 10 (00011111) |
| Room vent not normally required** | ✓ |
| | ✓ × |
| Room vent not normally required** | ✓ |

^{*} When fitted with a Smoke Control Kit.

CLEANBURN System





| Colour | Matt Black | Metallic Blue | Metallic Brown | Metallic Green | |
|-------------------|---------------------|------------------|-------------------|-------------------|--|
| Multi-fuel | ST5MIDMF1 | ST5MIDMF1BL | ST5MIDMF1BR | ST5MIDMF1GR | |
| Wood kit | WDKIT5 all models | | | | |
| Ash Caddy | 4227 all models | | | | |
| Sparkguard | 7225 all models | | | | |
| Smoke Control Kit | SZKIT5MF all models | | | | |
| Heat Shield Kit | ST5HSK all models | | | | |
| | | | | | |









Metallic Brown

Metallic Green

^{**}For more information on room vents, please see page 122







Design Features

- 1 5mm heavy duty steel body.
- 2 Easy fit.
- 3 Specifically designed for 16" or 18" Milner brick openings.
- 4 Cast Iron Side Panels.
- **5** Cast iron air-tight door with primary air control lever.
- **6** Airwash to maintain a cleaner glass window.
- 7 Heated air jets from Cleanburn ports burn hydrocarbons in smoke (internal).
- 8 External riddling lever.



Stockton Milner

The Stockton Milner has been specifically designed to fit into a 16"-18" wide and 20"-22" high fireplace without the Milner brick needing to be removed. This means that it can be easily secured and sealed into an existing chimney without the requirement for any building work making it cheaper to install. More efficient than an open fire, the Stockton Milner gives you greater control of combustion, more heat for your money and therefore lower fuel costs. Features of the Stockton Milner include, easy fitting, multi-fuel with external riddling, a convection system and Cleanburn & Airwash.

Key Facts

| High efficiency | up to 76% |
|-------------------------------------|----------------------------|
| Multi-fuel (with external riddling) | ✓ |
| Approved for Smoke Control Areas* | ✓ |
| Cleanburn | 1 |
| Airwash | ✓ |
| Nominal heat output and range | 5kW (2 - 6kW) |
| Maximum log length | 9 ^{7/8} " (250mm) |
| Room vent not normally required** | ✓ |
| Flue outlet | 6" top |

^{*} When fitted with a Smoke Control Kit.

^{**}For more information on room vents, please see page 122







Product Codes

| Multi-fuel | STMB |
|-------------------|-----------|
| Sparkguard | 7227 |
| Ash Caddy | 4227 |
| Smoke Control Kit | STMBSCKIT |








Brown



Metall Green

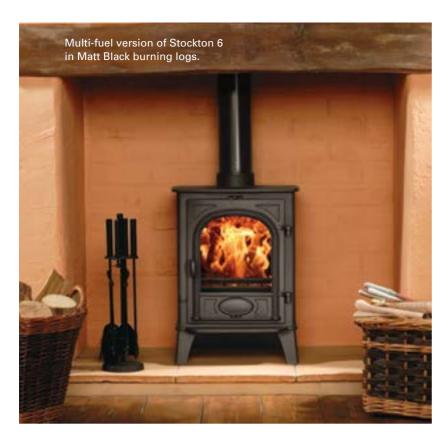





The superb combination of size and heating capacity make the standard Stockton 6 particularly versatile. It is produced as a woodburning stove (easily adapted to multi-fuel use with the optional riddling grate kit) or as a dedicated multi-fuel version with external riddling. Alternatively, you can choose the multi-fuel Stockton 6 Highline version (see pages 42 - 43) - a stove that provides an impressive focal point in kitchens and open plan rooms. All models also accept the optional 'clip-in' steel boiler - this will provide an abundant supply of domestic hot water during the winter months.

Key Facts

| High efficiency | up to 80% |
|--|----------------------------|
| Multi-fuel (with internal riddling) | ✓ |
| Multi-fuel (with external riddling) | ✓ |
| Wood | ✓ |
| Approved for Smoke Control Areas* | ✓ |
| Cleanburn | ✓ |
| Airwash | ✓ |
| Flat top | ✓ |
| Nominal heat output and range | 6kW (3 - 7kW) |
| Maximum log length | 9 ^{7/8} " (250mm) |
| Boiler option (for outputs see page 122) | ✓ |
| Flue outlet | 5" top or rear |
| Choice of four colours | ✓ |

^{*} When fitted with a Smoke Control Kit.







Metallic Blue



Metallic Brown



Metallic












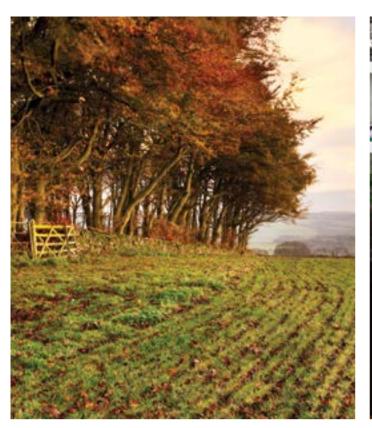



Stockton 6 Highline

Product Codes - Standard version

| Colour | Matt Black | Metallic Blue | Metallic Brown | Metallic Green |
|--------------------|-------------------|------------------|-------------------|-------------------|
| Wood version | ST6W1 | ST6W1BL | ST6W1BR | ST6W1GR |
| Multi-fuel kit | | MFKIT6 | all models | |
| Multi-fuel version | ST6MF1 | ST6MF1BL | ST6MF1BR | ST6MF1GR |
| Wood kit | | WDKIT6 | all models | |
| Clip-in boiler | 7206 all models | | | |
| Sparkguard | 7226 all models | | | |
| Ash Caddy | 4227 all models | | | |
| Smoke Control Kit | SZKIT6 all models | | | |
| Heat Shield Kit | ST6HSK all models | | | |
| | | | | |

Product Codes - Highline version

| Colour | Matt Black | Metallic Blue | Metallic Brown | Metallic Green |
|-----------------------------------|-----------------|------------------|-------------------|-------------------|
| Multi-fuel with external riddling | ST6HLMF1 | ST6HLMF1BL | ST6HLMF1BR | ST6HLMF1GR |
| Wood kit | | WDKIT6 | all models | |
| Clip-in boiler | 7206 all models | | | |
| Sparkguard | 7226 all models | | | |
| Ash Caddy | | 4227 all | models | |
| Smoke Control Kit | | SZKIT6 a | II models | |
| Heat Shield Kit | | ST6HSK a | all models | |







Warming Shelf Tiles

Every Highline stove is supplied with a 3-tile set for the warming shelf, in a choice of 8 colours.

| 6506S Brown | 6106S Red |
|-------------|-------------|
| | |
| 6606S Blue | 6306S Black |
| | |
| 6706S Green | 6206S Buff |
| 7 2 200 | |
| 6806S Grey | 6406S White |









Matt Black Metallic Blue

Metallic Metallic Brown Gr

Metallic Green







The larger, but perfectly proportioned dimensions of the Stockton 7 make it an ideal choice for grander rooms. With significant heating potential of up to 7kW, it is easily capable of providing warmth and ambience to even the loftiest of spaces. Available as a solid fuel or woodburning appliance, the Stockton 7 can take logs up to 12¾" (325mm) in length meaning less work is required to prepare the fuel for your stove.

| High efficiency | up to 80% |
|--|-----------------------------|
| Multi-fuel (with internal riddling) | 1 |
| Multi-fuel (with external riddling) | 1 |
| Wood | ✓ |
| Approved for Smoke Control Areas* | 1 |
| Cleanburn | 1 |
| Airwash | 1 |
| Flat top | ✓ |
| Nominal heat output and range | 7kW (4 - 9kW) |
| Maximum log length | 12 ^{3/4} " (325mm) |
| Boiler option (for outputs see page 127) | 1 |
| Flue outlet | 6" top or rear |

^{*} When fitted with a Smoke Control Kit.



Choice of four colours

Key Facts





Product Codes

| Colour | Matt Black | Metallic Blue | Metallic Brown | Metallic Green |
|--------------------|-------------------|------------------|-------------------|-------------------|
| Wood version | ST7W1 | ST7W1BL | ST7W1BR | ST7W1GR |
| Multi-fuel kit | | MFKIT7 a | all models | |
| Multi-fuel version | ST7MF1 | ST7MF1BL | ST7MF1BR | ST7MF1GR |
| Wood kit | WDKIT7 all models | | | |
| Clip-in boiler | 7207 all models | | | |
| Sparkguard | 7227 all models | | | |
| Ash Caddy | 4227 all models | | | |
| Smoke Control Kit | SZKIT5 all models | | | |
| Heat Shield Kit | ST7HSK all models | | | |










Brown

Metallic Green



Design Features

- 1 5mm heavy duty steel body.
- 2 Easy fit flue connection through stove.
- **3** Vermiculite, thermal brick liner system.
- Cast iron air-tight door with primary air control lever, clearly labelled and with a smooth trajectory for ease of use.
- 5 Airwash control lever and boost setting to maintain a cleaner glass window.
- 6 Heated air jets from Cleanburn ports burn hydrocarbons in smoke.
- 7 External riddling lever.
- **8** High output boiler version also available.
- 9 Optional smoke control kit available (not illustrated)



Stockton 7 Inset Convector

The Stockton range has been developed to offer you an inset convector fireplace with most of the heating advantages of a freestanding Stockton stove. With its cleverly designed Cleanburn and convection systems, the Stockton 7 Inset Convector is around four times more efficient than an open fire; giving you greater control of combustion, more heat for your money and lower fuel costs. There is also an integral boiler version which produces up to 25,000 BTU's of hot water (see pages 112 - 115).

| Ney racts | |
|--|-----------------------------|
| High efficiency | up to 87% |
| Multi-fuel (with external riddling) | ✓ |
| Approved for Smoke Control Areas* | 1 |
| Cleanburn | √ |
| Airwash | √ |
| Radiant heat + convection systems | √ |
| Flat top and low canopy versions | √ |
| Nominal heat output and range | 7kW (3 - 8kW) |
| Maximum log length | 12 ^{3/4} " (325mm) |
| Integral Boiler version (see page 112 - 115) | √ |
| Flue outlet | 5" top |
| | |

Product Codes

| Colour | Matt Black | Metallic Blue | Metallic Brown | Metallic Green |
|-------------------|--------------------|------------------|-------------------|-------------------|
| Flat top | ST7NMFFT1 | ST7NMFFT1BL | ST7NMFFT1BR | ST7NMFFT1GR |
| Low canopy | ST7NMFLC1 | ST7NMFLC1BL | ST7NMFLC1BR | ST7NMFLC1GR |
| Sparkguard | 7227 all models | | | |
| Ash Caddy | 4227 all models | | | |
| Smoke Control Kit | SZKIT7N all models | | | |
| | | | | |









Green

Brown





Choice of four colours

Koy Facts













The Stockton 8 offers you greater choice and more optional features than any other model. Choose from a single or two door model, the latter of which is available with a handy cast iron tool (not shown) that locates over the keystone catch and then rotates to open or close the doors. To complete its versatility, the Stockton 8 is also offered with an integral boiler which produces up to 34,000 BTUs of hot water; for more information about our boiler stoves please see pages 112 - 115.

| Key Facts | Standard |
|--|-----------------------------|
| High efficiency | up to 81% |
| Wood | ✓ |
| Multi-fuel kit | ✓ riddling |
| Multi-fuel (with external riddling) | ✓ |
| Cleanburn | ✓ |
| Airwash | √ |
| Flat top version | ✓ |
| Low and high canopy versions | √ |
| Single door version | √ |
| Two door version | √ |
| Integral boiler version (see pages 112 - 115) | ✓ |
| Clip-in boiler option (for outputs see page 137) | ✓ |
| Nominal heat output and range | 8kW (4 - 11kW) |
| Maximum log length | 15 ^{3/4} " (400mm) |
| Flue outlet | 6" top or rear |
| Choice of four colours | ✓ |















Product Codes - Standard version

| Colour | Matt Black | Metallic Blue | Metallic Brown | Metallic Green |
|---|-------------------|---------------|----------------|----------------|
| Wood - flat top, single door | ST8W1 | ST8W1BL | ST8W1BR | ST8W1GR |
| Wood - low canopy, single door | ST8WLC1 | ST8WLC1BL | ST8WLC1BR | ST8WLC1GR |
| Wood - high canopy, single door | ST8WHC1 | ST8WHC1BL | ST8WHC1BR | ST8WHC1GR |
| Wood - flat top, two door [†] | ST8W2 | ST8W2BL | ST8W2BR | ST8W2GR |
| Wood - low canopy, two door [†] | ST8WLC2 | ST8WLC2BL | ST8WLC2BR | ST8WLC2GR |
| Wood - high canopy, two door [†] | ST8WHC2 | ST8WHC2BL | ST8WHC2BR | ST8WHC2GR |
| Multi-fuel kit | MFKIT8 all models | | | |
| Multi-fuel - flat top, two door | ST8MF2 | ST8MF2BL | ST8MF2BR | ST8MF2GR |
| Wood kit | WDKIT8 all models | | | |
| Clip-in boiler | 7208 all models | | | |
| Sparkguard | 7228 all models | | | |
| Ash Caddy | 4228 all models | | | |

 $^{^{\}scriptscriptstyle \dagger}$ Two door version - UK Registered Design Application No. 3001055.



Matt Black



Metallic Blue



Metallic Brown




Metallic Green



Design Features

- 1 5mm heavy duty steel body.
- **2** Easy fit flue connection through stove.
- **3** Vermiculite, thermal brick liner system.
- 4 Cast iron air-tight door with primary air control lever, clearly labelled and with a smooth trajectory for ease of use.
- 5 Airwash control lever and boost setting to maintain a cleaner glass window.
- 6 Heated air jets from Cleanburn ports burn hydrocarbons in smoke.
- **7** External riddling lever.



Stockton 8 Inset Convector

Not only will this convector fireplace provide impressive heating capacity compared to a standard open fireplace, but it also offers you most of the benefits of our freestanding Stockton 8 Stoves. The Stockton 8 Inset is highly practical too. It has full multi-fuel capability with external riddling, double doors for easy loading and both Cleanburn and convection systems for greater heating efficiency, whilst the highly effective airwash facility ensures that you enjoy a clearer view of the fire.

Key Facts

| High efficiency | up to 84% |
|-------------------------------------|-----------------------------|
| Multi-fuel (with external riddling) | ✓ |
| Cleanburn | ✓ |
| Airwash | √ |
| Radiant heat + convection systems | ✓ |
| Flat top and low canopy versions | ✓ |
| Nominal heat output and range | 8kW (3 - 10kW) |
| Maximum log length | 15 ^{3/4} " (400mm) |
| Flue outlet | 5" top |
| Choice of four colours | ✓ |

| Colour | Matt Black | Metallic Blue | Metallic Brown | Metallic Green |
|------------|-----------------|------------------|-------------------|----------------|
| Flat top | ST8NMFFT2 | ST8NMFFT2BL | ST8NMFFT2BR | ST8NMFFT2GR |
| Low canopy | ST8NMFLC2 | ST8NMFLC2BL | ST8NMFLC2BR | ST8NMFLC2GR |
| Sparkguard | 7228 all models | | | |
| Ash Caddy | 4228 all models | | | |









CLEANBURN System



rown

Metallic Green







The larger sized Stockton 11 offers up to 11kW heat output and has a choice of flat top, low or high canopy, single or double door versions and four colour options. The Stockton 11 can look at home in a modern open plan house or equally in a large inglenook of a country cottage. Furthermore, the vast firebox is designed to accept logs up to 500mm long, so you do not need to load fuel so often!

Key Facts

| High efficiency | up to 81% |
|--|-----------------------------|
| Multi-fuel (with internal riddling) | ✓ |
| Wood | √ |
| Cleanburn | ✓ |
| Airwash | ✓ |
| Flat top, low and high canopy versions | ✓ |
| Single and two door versions | ✓ |
| Nominal heat output and range | 11kW (7 - 14kW) |
| Maximum log length | 19 ^{1/2} " (500mm) |
| Integral boiler option (see pages 112 - 115) | √ |
| Clip-in boiler option (for outputs see page 138) | ✓ |
| Flue outlet | 6" top or rear |
| Choice of four colours | ✓ |

Product Codes

| Colour | Matt Black | Metallic Blue | Metallic Brown | Metallic Green |
|--------------------------------|---------------|------------------|-------------------|-------------------|
| Wood - flat top, single door | ST11W1 | ST11W1BL | ST11W1BR | ST11W1GR |
| Wood - low canopy, single door | ST11WLC1 | ST11WLC1BL | ST11WLC1BR | ST11WLC1GR |
| Wood - high canopy, single doo | r ST11WHC1 | ST11WHC1BL | ST11WHC1BR | ST11WHC1GR |
| Wood - flat top, two door | ST11W2 | ST11W2BL | ST11W2BR | ST11W2GR |
| Wood - low canopy, two door | ST11WLC2 | ST11WLC2BL | ST11WLC2BR | ST11WLC2GR |
| Wood - high canopy, two door | ST11WHC2 | ST11WHC2BL | ST11WHC2BR | ST11WHC2GR |
| Multi-fuel kit | | MFKIT11 all s | tandard model | S |
| Clip-in boiler | | 7211-2 all sta | andard models | |
| Ash Caddy | | 7221 a | II models | |
| Sparkguard | | 4228 a | II models | |







Matt Black







Green

Brown









With an impressive 14kW heat output, this dedicated woodburner is the largest stove in the Stockton range and is particularly suitable for sizeable living rooms, substantial inglenooks and open-plan barn conversions. There is a choice of flat top and high canopy versions in all four colour options, providing you with the perfect combination for your home.

| Cey F | acts |
|-------|------|
|-------|------|

| High efficiency | up to 73% |
|--|-----------------------------|
| Wood | ✓ |
| Multi-fuel | X |
| Cleanburn | ✓ |
| Airwash | √ |
| Flat top and high canopy versions | ✓ |
| Two door version | ✓ |
| Nominal heat output and range | 14kW (8 - 17kW) |
| Maximum log length | 23 ^{5/8} " (600mm) |
| Integral boiler option (pages 112 - 115) | ✓ |
| Flue outlet | 6" top or rear |
| Choice of four colours | ✓ |

Product Codes

| Colour | Black | Blue | Brown | Green |
|------------------------------|----------|------------|------------|------------|
| Wood - flat top, two door | ST14W2 | ST14W2BL | ST14W2BR | ST14W2GR |
| Wood - high canopy, two door | ST14WHC2 | ST14WHC2BL | ST14WHC2BR | ST14WHC2GR |
| Ash Caddy | | 7221 a | ll models | |
| Sparkguard | | 4228 a | ll models | |
| | | | | |













Brown

Metallic




Metallic Green







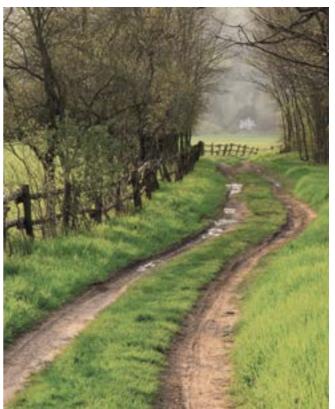

Stockton Double Sided

Enjoy twice the comfort and twice the view of your fire with a Stockton double sided stove. Using one central chimney, the doors to both the back and the front of the stove are designed to open into adjacent rooms. So, compared to individual stoves in each room, you have less work refuelling and even more of a focal point to your home.

There are two sizes of stove from which to choose – Stockton 8 Double and Stockton 11 Double. Although this double sided configuration does not allow the incorporation of full Cleanburn technology, both stoves still include an airwash system to keep the glass clean. The smaller Stockton 8 Double will provide you with a significant heat output, up to 9kW, whilst the Stockton 11 Double produces an even more powerful 11kW.

| Key Facts | 8 Double | 11 Double |
|----------------------------------|-----------------------------|-----------------------------|
| High efficiency | up to 69% | up to 77% |
| Multi-fuel kit | ✓ | ✓ |
| Wood | ✓ | ✓ |
| Airwash | ✓ | ✓ |
| Nominal heat output and range | 9kW (5 - 11kW) | 11kW (7 - 14kW) |
| Maximum log length | 15 ^{3/4} " (400mm) | 19 ^{3/4} " (500mm) |
| Boiler option | Х | Х |
| Flue outlet | 6" top | 6" top |
| Choice of four colours | ✓ | ✓ |
| Flat top and high canopy options | 1 | 1 |

Product Codes Matt Metallic Metallic Colour Black Blue Brown 8 Double wood ST8SDW2 ST8SDW2BL ST8SDW2BR - flat top 8 Double wood ST8SDWHC2 ST8SDWHC2BL ST8SDWHC2BR - high canopy Multi-fuel kit MFKIT8SD all models Sparkguard 7228 all models 11 Double wood ST11SDW2 ST11SDW2BL ST11SDW2BR - flat top 11 Double wood ST11SDWHC2 ST11SDWHC2BL ST11SDWHC2BR ST11SDWHC2GR - high canopy Multi-fuel kit MFKIT11SD all models Sparkguard 7221 all models







Metallic



Metallic Brown Green

Metallic

ST8SDW2GR

ST8SDWHC2GR

ST11SDW2GR

Green







Riva Plus Small

Compact yet powerful, this stove not only has the performance and fuel efficiency to heat your room or living space effectively, but also the versatility to match your decorative style.

Key Facts

| High efficiency | up to 79% |
|--|----------------|
| Multi-fuel (with external riddling) | ✓ |
| Wood | ✓ |
| Approved for Smoke Control Areas* | RVP-SMM |
| Cleanburn | ✓ |
| Airwash | √ |
| Boost setting for lighting & re-fuelling | ✓ |
| Flat top version | ✓ |
| Low and high canopy versions | ✓ |
| Optional fan-assisted convection system | ✓ |
| Optional external air kit | ✓ |
| Nominal heat output and range | 5kW (2 - 7kW) |
| Maximum log length | 10" (250mm) |
| Room vent not normally required** | ✓ |
| Boiler option | Х |
| Flue outlet | 5" top or rear |
| | |

 $^{^{*}}$ Multi-fuel model only, when fitted with a Smoke Control Kit.

^{**}For more information on room vents, please see page 122









| Woodburner - flat top | RVP-SMW |
|-----------------------------------|----------------------|
| Multi-fuel - flat top | RVP-SMM |
| External air kit | RVP0001 both models |
| Fan-assisted convection kit | RVP0006 both models |
| MF [†] Smoke Control Kit | RVP-SMMSCKIT |
| Low Canopy | RVP-SMLC both models |
| High Canopy | RVP-SMHC both models |
| | |

†MF - Multi-fuel models



Matt Black



Riva Plus Small Woodburning with low canopy









Riva Plus Midi

If you have a little more space available then the Riva Plus Midi will provide you with the extra heating capacity to make slightly larger rooms cosy throughout the winter.

Key Facts

| High efficiency | up to 72% |
|---|-------------------|
| Multi-fuel (with external riddling) | ✓ |
| Wood | ✓ |
| Approved for Smoke Control Areas* | RVP-MDM |
| Cleanburn | ✓ |
| Airwash | ✓ |
| Boost setting for lighting & re-fuelling | ✓ |
| Flat top version | ✓ |
| Low and high canopy versions | ✓ |
| Optional fan-assisted convection system | ✓ |
| Optional external air kit | ✓ |
| Removable window crosses for 'clear door' | ✓ |
| Nominal heat output and range | 6.5kW (2.5 - 8kW) |
| Maximum log length | 12" (300mm) |
| Boiler option | Х |
| Flue outlet | 5" top or rear |

^{*} Multi-fuel model only, when fitted with a Smoke Control Kit.

CLEANBURN System







| Woodburner - flat top | RVP-MDW |
|-----------------------------------|----------------------|
| Multi-fuel - flat top | RVP-MDM |
| External air kit | RVP0002 both models |
| Fan-assisted convection kit | RVP0006 both models |
| MF [†] Smoke Control Kit | RVP-MEMSCKIT |
| Low Canopy | RVP-MDLC both models |
| High Canopy | RVP-MDHC both models |

†MF - Multi-fuel models



Matt Black



Riva Plus Midi Multi-fuel burning logs with high canopy







Riva Plus Medium

This versatile model is ideal for medium to larger sized rooms and is available in both wood and multi-fuel versions. There are also several options to suit your individual needs.

Key Facts

| up to 71% |
|----------------|
| ✓ |
| ✓ |
| RVP-MEM |
| ✓ |
| ✓ |
| ✓ |
| ✓ |
| ✓ |
| ✓ |
| ✓ |
| ✓ |
| 8kW (3 - 10kW) |
| 14" (350mm) |
| X |
| 5" top or rear |
| |

^{*} Multi-fuel model only, when fitted with a Smoke Control Kit.









Product Codes

| Woodburner - flat top | RVP-MEW |
|-----------------------------------|----------------------|
| Multi-fuel - flat top | RVP-MEM |
| External air kit | RVP0003 both models |
| Fan-assisted convection kit | RVP0009 both models |
| MF [†] Smoke Control Kit | RVP-MEMSCKIT |
| Low Canopy | RVP-MELC both models |
| High Canopy | RVP-MEHC both models |

†MF - Multi-fuel models



Matt Black



Riva Plus Medium Woodburning with low canopy









Riva Plus Large

A big stove to make a big impact. Whether you are seeking significant heating potential, a magnificent focal point or have a large inglenook, this generously-proportioned stove can achieve all these aspirations.

Key Facts

| High efficiency | up to 78% |
|---|-----------------|
| Multi-fuel (with external riddling) | ✓ |
| Wood | ✓ |
| Cleanburn | ✓ |
| Airwash | ✓ |
| Boost setting for lighting & re-fuelling | ✓ |
| Flat top version | ✓ |
| Low and high canopy versions | ✓ |
| Optional fan-assisted convection system | ✓ |
| Optional external air kit | ✓ |
| Removable window crosses for 'clear door' | ✓ |
| Nominal heat output and range | 11kW (4 - 13kW) |
| Maximum log length | 16" (400mm) |
| Boiler option | Х |
| Flue outlet | 6" top or rear |







Additional image shown on page 143.

Product Codes

| Woodburner - flat top | RVP-LAW |
|-----------------------------|----------------------|
| Multi-fuel - flat top | RVP-LAM |
| External air kit | RVP0004 both models |
| Fan-assisted convection kit | RVP0009 both models |
| Low Canopy | RVP-LALC both models |
| High Canopy | RVP-LAHC both models |



Matt Black




Riva Plus Large Woodburning with high canopy and removable window crosses.





Contemporary Stoves





Vogue Stoves

Combining the very latest firebox engineering with elegant, modern styling, the Vogue woodburning range represents the next generation of stove design. With a choice of five sizes as well as hearth, Plinth and Midline log store mounting options, these versatile stoves bring a stunning focal point to any interior.

Vision Stoves

With their sleek black glass finish, Vision stoves occupy the forefront of contemporary style. Presented in five sizes including both woodburning and multi-fuel models, with a variety of styling options, these designer stoves are equally at home mounted on a stove bench or freestanding on a hearth.

Designed for Our Environment

Whilst many of our stoves feature Cleanburn technology for high performance heating, Vogue and Vision woodburning models burn so cleanly they go far beyond expectation. Our SIA Ecodesign Ready stoves meet, and in some cases even exceed, future 2022 Ecodesign flue gas emission and thermal efficiency standards.





The ultra-green, high efficiency combustion process of Ecodesign stoves ensures that substances present in smoke emissions such as Carbon Monoxide (CO), nitrogen oxides (NOx), organic gaseous compounds (OGC) and particulates (PM) are minimised. This makes them not only suitable for Smoke Control Areas but also some of the most eco-friendly stoves in the world.



View Stoves

As stylish as they are versatile, View stoves are available in four freestanding sizes with Midline log store options, as well as an inset model that can be built into the wall. This sophisticated stove range is further extended by two high output boiler models, which are capable of supplying up to nine radiators as well as heating the room in which they are installed, for a complete home heating solution. All View stoves feature an expansive glass window to display their superb flame picture.

Freestanding Fires

Alongside our contemporary stoves are a number of modern freestanding woodburning and multi-fuel fire ranges that feature clean designs and stunning flame visuals. Cutting edge in both form and function, the Riva Freestanding, Studio Freestanding and Freestanding Elise fires create a striking centrepiece at the very heart of your home.



Studio 3 Freestanding




Freestanding Elise 540



Contemporary Stoves



Key Features

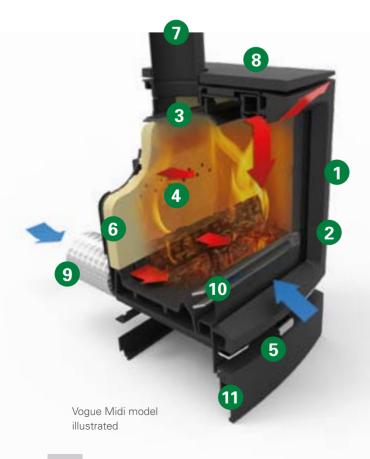

Vogue Design Features

- 1 Heavy duty steel body
- 2 Airtight cast iron glass door.
- **3** Steel baffle.
- **4** Heated air jets from Cleanburn ports burn hydrocarbons in smoke.
- **5** Single lever for state-of-the-art control of cleanburn combustion and airwash system
- 6 High density, thermal brick liner system
- 7 Top or rear flue exit connecting stove to flue pipe
- 8 Integral cast iron top plate
- 9 Optional external air facility for draught reduction
- 10 Stainless steel controls and log guard
- 11 Optional cast iron decorative Plinth or Midline wood store base
- 12 Smoke Control Approved as standard (not illustrated)
- 13 Optional contemporary stove benches (see page 123).











Multi-fuel model illustrated







View Design Features

- 1 5mm heavy duty steel body.
- 2 Cast iron airtight door with integrated primary air control slider
- **3** Cast iron fireback incorporating heat exchanger for Cleanburn system.
- 4 Heated air jets from Cleanburn ports burn hydrocarbons in smoke
- 5 Integrated Airwash control slider to maintain a cleaner glass window.
- **6** Riddling with removable tool (multi-fuel versions).
- 7 Top or rear flue exit connecting to stove flue pipe.
- 8 Firebrick lining.
- 9 Optional glass top plate
- 10 Integral glass fronted plinth.
- 11 Specially developed, integral boiler version (see page 108).
- **12** Cleanburn air control ports (not illustrated).

 These are on the rear of the stove and pre-set in the factory.
- 13 Optional smoke control kit (not illustrated) on most models
- 14 Stainless steel fire tools included.
- 15 Optional contemporary stove benches (see page 123).

Vision Design Features

- 1 Heavy duty steel body
- 2 Airtight contemporary glass door.
- 3 Steel baffle.
- 4 Heated air jets from Cleanburn ports burn hydrocarbons in smoke.
- **5** Single lever for state-of-the-art control of cleanburn combustion and airwash system
- 6 High density, thermal brick liner system
- 7 Top or rear flue exit connecting stove to flue pipe
- 8 Optional ceramic glass top plate
- **9** Optional external air facility for draught reduction
- 10 Stainless steel controls and log guard
- 11 Smoke Control Approved (not illustrated)*
- **12** Optional decorative glass plinth (not illustrated)
- 13 Optional contemporary stove benches (see page 123).

*Multi-fuel models require optional Smoke Control Kit. Woodburning models are approved as standard.









model illustrated





Vogue Small





Combining cutting edge technology with advanced firebox engineering, the Vogue Small offers a powerful heat output of 5kW despite being the most compact model in the range. This state-of-the-art, woodburning stove burns so cleanly, emissions are lowered to minimal levels, making it compliant with future Ecodesign standards (see page 68 for more information).

Vogue Small stoves have a variety of mounting options and can be installed on a Plinth, Midline log store or stove bench to create the perfect fireplace to suit your home.

Key Facts

| High efficiency | up to 81% |
|---|-----------------|
| Wood | ✓ |
| Approved for Smoke Control Areas* | ✓ |
| Ecodesign compliant with forthcoming regulations on CO, Particulates, OGC's and NOx emissions | ✓ |
| Cleanburn | ✓ |
| Airwash | ✓ |
| Integral cast iron top plate | ✓ |
| Optional dedicated external air kit | ✓ |
| Optional Plinth base | ✓ |
| Optional Midline wood store base | ✓ |
| Nominal heat output and range | 5.0kW (2 - 7kW) |
| Maximum log length | 11" (280mm) |
| Room vent not normally required** | ✓ |
| Flue outlet | 5" top or rear |
| Stove bench compatible | ✓ |

| Wood | VG-SMWU-E |
|-----------------------------|------------|
| Plinth Base | VG-SM-BP |
| Midline Base | VG-SM-BML |
| Ash Caddy | 4227 |
| External Air Combustion Kit | SMAIR-E |
| Heat Shield Kit | VG-SMHSK-E |



^{*} Subject to official listing

Matt Black









^{**} For more information on room vents, please see page 122







Vogue Small T





This T version of the Vogue Small offers the same small size but provides a taller, portrait flame view. Vogue stoves can be futher increased in height with either the optional Plinth or Midline log store base, in addition to Stovax's choice of stove benches.

The Vogue range is compliant with future Ecodesign efficiency and emission targets and is also DEFRA Smoke Control Zone exempt, meaning these stoves can be enjoyed in either rural and urban settings.

Key Facts

| High efficiency | up to 78% |
|---|-----------------|
| Wood | ✓ |
| Approved for Smoke Control Areas* | ✓ |
| Ecodesign compliant with forthcoming regulations on CO, Particulates, OGC's and NOx emissions | ✓ |
| Cleanburn | ✓ |
| Airwash | ✓ |
| Integral cast iron top plate | ✓ |
| Optional dedicated external air kit | ✓ |
| Optional Plinth base | ✓ |
| Optional Midline wood store base | ✓ |
| Nominal heat output and range | 4.8kW (2 - 7kW) |
| Maximum log length | 11" (280mm) |
| Room vent not normally required** | ✓ |
| Flue outlet | 5" top or rear |
| Stove bench compatible | 1 |

| Wood | VG-SMTWU-E |
|-----------------------------|-------------|
| Plinth Base | VG-SM-BP |
| Midline Base | VG-SM-BML |
| Ash Caddy | 4227 |
| External Air Combustion Kit | SMAIR-E |
| Heat Shield Kit | VG-SMTHSK-E |



- * Subject to official listing
- ** For more information on room vents, please

Matt Black











Vogue Midi





Offering a superb view of the flames, the versatile styling of the Vogue Midi fits perfectly into contemporary and traditional interiors alike. Featuring advanced Ecodesign ready Cleanburn combustion systems, the Midi is capable of burning at an impressive 81% thermal efficiency whilst generating an ample 5kW of heat.

All models in the Vogue range benefit from a host of mounting choices including a Plinth, Midline log store or one of the many Stovax stove benches.

| Key | Facts |
|------|---------|
| High | efficie |

| High efficiency | up to 78% |
|---|-------------------|
| Wood | ✓ |
| Approved for Smoke Control Areas | ✓ |
| Ecodesign compliant with forthcoming regulations on CO, Particulates, OGC's and NOx emissions | ✓ |
| Cleanburn | ✓ |
| Airwash | ✓ |
| Integral cast iron top plate | ✓ |
| Optional dedicated external air kit | ✓ |
| Optional Plinth base | ✓ |
| Optional Midline wood store base | ✓ |
| Nominal heat output and range | 5.0kW (2.5 - 7kW) |
| Maximum log length | 13" (330mm) |
| Room vent not normally required* | ✓ |
| Flue outlet | 5" top or rear |
| Stove bench compatible | ✓ |

Product Codes

| Wood | VG-MIDWU-E |
|-----------------------------|-------------|
| Plinth Base | VG-MID-BP |
| Midline Base | VG-MID-BML |
| Ash Caddy | 4228 |
| External Air Combustion Kit | MIDAIR-E |
| Heat Shield Kit | VG-MIDHSK-E |

See page 27 for additional image.



Matt Black















Vogue Midi T





The Midi T is a taller version of the Vogue Midi, offering the same ultra cleanburn capability of the Midi, but featuring a more portrait firebox. Displaying superb visuals through the large stove window, the powerful Airwash system ensures the flames can always be appreciated. The Midi T can be installed with the Midline log store base for convenient fuel storage and increased height.

| Key Facts | |
|-------------------------------------|-------------------|
| High efficiency | up to 80% |
| Wood | ✓ |
| Approved for Smoke Control Areas | ✓ |
| Cleanburn | ✓ |
| Airwash | ✓ |
| Integral cast iron top plate | √ |
| Optional dedicated external air kit | ✓ |
| Optional Plinth base | √ |
| Optional Midline wood store base | ✓ |
| Nominal heat output and range | 5.0kW (2.5 - 7kW) |
| Maximum log length | 13" (330mm) |
| Room vent not normally required* | ✓ |
| Flue outlet | 5" top or rear |
| Stove bench compatible | <u> </u> |

^{*}For more information on room vents, please see page 122

Product Codes

| Wood | VG-MIDTWU-E |
|-----------------------------|--------------|
| Plinth Base | VG-MID-BP |
| Midline Base | VG-MID-BML |
| Ash Caddy | 4228 |
| External Air Combustion Kit | MIDAIR-E |
| Heat Shield Kit | VG-MIDTHSK-E |

See page 27 & 70 for additional images.



Matt Black











Vogue Medium





The Vogue Medium provides an impressive 7kW of heat, making it a great choice for larger living spaces. With an expansive stove window that features self-cleaning Airwash technology, the Medium's superb flame visuals provide a captivating focal point on a cold winter's eve. Featuring the very latest combustion technology, this eco-friendly stove burns so cleanly it is compliant with future Ecodesign emission standards (for more information see page 68).

Available with Plinth or Midline log store base options, this modern-traditional woodburning stove can be either installed into a fireplace opening or placed freestanding against a wall. The Vogue Medium is also compatible with our range of stove benches for an alternative, but eye-catching, installation.

Key Facts

| High efficiency | up to 76% |
|---|------------------|
| Wood | / |
| Approved for Smoke Control Areas | 1 |
| Ecodesign compliant with forthcoming regulations on CO, Particulates, OGC's and NOx emissions | ✓ |
| Cleanburn | ✓ |
| Airwash | 1 |
| Integral cast iron top plate | ✓ |
| Optional dedicated external air kit | ✓ |
| Optional Plinth base | ✓ |
| Optional Midline wood store base | ✓ |
| Nominal heat output and range | 7.5kW (5 - 11kW) |
| Maximum log length | 17" (430mm) |
| Room vent not normally required* | ✓ |
| Flue outlet | 6" top or rear |
| Stove bench compatible | √ |

^{*}When fitted with a dedicated external air kit. For more information on room vents, please see page 122.

| Wood | VG-MEDWU-E |
|-----------------------------|-------------|
| Plinth Base | VG-MED-BP |
| Midline Base | VG-MED-BML |
| Ash Caddy | 4230 |
| External Air Combustion Kit | MEDAIR-E |
| Heat Shield Kit | VG-MEDHSK-E |



Matt Black













View 3

Offering a more contemporary slant to our wide choice of steel stoves is the View range. Although designed to be installed into a standard 22" (560mm) high x 16" (405mm) wide opening with the chair brick removed, it is just as attractive freestanding on a hearth or stove bench. This compact View 3 stove offers you multi-fuel capacity and high efficiency heating. The beauty of this stove can be further enhanced by adding a high-gloss flue pipe; see page 120 for further details.

Key Facts

| High efficiency | up to 86% |
|-------------------------------------|----------------------------|
| Multi-fuel (with external riddling) | ✓ |
| Approved for Smoke Control Areas | ✓ |
| Cleanburn | ✓ |
| Airwash | ✓ |
| Ceramic glass top (optional) | ✓ |
| Integral ceramic glass plinth | ✓ |
| Nominal heat output and range | 3.75kW (2 - 5kW) |
| Maximum log length | 7 ^{7/8} " (200mm) |
| Room vent not normally required* | ✓ |
| Boiler option | X |
| Flue outlet | 5" top or rear |
| Stove bench compatible | ✓ |
| | |

^{*}For more information on room vents, please see page 122

| Multi-fuel | VW-3MF1 |
|----------------------------------|--------------|
| Glass top plate (top flue exit) | VW-3GB |
| Glass top plate (rear flue exit) | VW-3GBR |
| Ash Caddy | 4227 |
| Stainless Steel Handle Set | VW-HANDLE-SS |
| Heat Shield Kit | ST3HSK |
| Stove benches | See page 123 |



Metallic Black












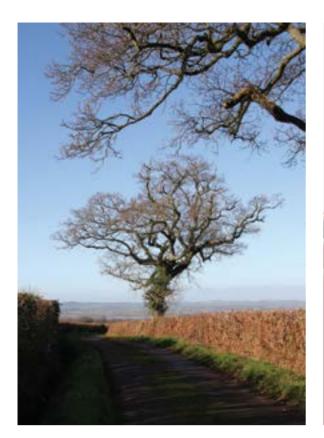



View 5

With its clean, crisp lines and modern styling, the View 5 offers a fresh alternative for today's interiors. It is available in two versions: woodburning only or multi-fuel. In addition, both versions can be enhanced by stainless steel air controls as well as an optional glass top which provides even greater elegance for this versatile stove.

| Key Facts | |
|-------------------------------------|-------------------|
| High efficiency | up to 85% |
| Multi-fuel (with external riddling) | ✓ |
| Wood | / |
| Approved for Smoke Control Areas | / |
| Cleanburn | 1 |
| Airwash | / |
| Ceramic glass top (optional) | / |
| Integral ceramic glass plinth | / |
| Nominal heat output and range | 4.9kW (2.5 - 7kW) |
| Maximum log length | 13" (330mm) |
| Room vent not normally required* | ✓ |
| Boiler option | Х |
| Flue outlet | 5" top or rear |
| Stove bench compatible | J |

^{*}For more information on room vents, please see page 122

| Wood | VW-5W1 |
|----------------------------------|--------------|
| Multi-fuel | VW-5MF1 |
| Glass top plate (top flue exit) | VW-5GB |
| Glass top plate (rear flue exit) | VW-5GBR |
| Ash Caddy | 4228 |
| Stainless Steel Handle Set | VW-HANDLE-SS |
| Heat Shield Kit | ST5HSK |
| Stove benches | See page 123 |



Metallic Black









View 5 Midline

To give you a further styling option, the View 5 is available in a Midline format. Providing all the heat outputs and efficiencies of the standard View 5, the Midline includes an integral log store base providing additional height and presence to this contemporary and versatile stove, giving an even better view of the stunning flame picture.

| Key Facts | |
|----------------------------------|-------------------|
| High efficiency | up to 85% |
| Multi-fuel | ✓ |
| Wood | ✓ |
| Approved for Smoke Control Areas | ✓ |
| Cleanburn | ✓ |
| Airwash | ✓ |
| Ceramic glass top (optional) | ✓ |
| Integral ceramic glass plinth | Х |
| Nominal heat output and range | 4.9kW (2.5 - 7kW) |
| Maximum log length | 13" (330mm) |
| Room vent not normally required* | ✓ |
| Boiler option | Х |
| Flue outlet | 5" top or rear |
| Stove bench compatible | ✓ |

^{*}For more information on room vents, please see page 122

| Wood | VW-5MIDW1 |
|----------------------------------|--------------|
| Multi-fuel | VW-5MIDMF1 |
| Glass top plate (top flue exit) | VW-5GB |
| Glass top plate (rear flue exit) | VW-5GBR |
| Ash Caddy | 4228 |
| Stainless Steel Handle Set | VW-HANDLE-SS |
| Heat Shield Kit | ST5HSK |



Metallic Black











View 5T

The View 5T's tall, portrait design instantly adds an impressive centrepiece to any interior with its geometric styling and vertical lines. Presented in both woodburning and multi-fuel versions, the 5T's stature fits perfectly in freestanding installations or in taller fireplaces.

Incorporating the View stove range's cutting edge combustion systems as well as easy to use controls, the View 5T provides a nominal 5kW of easily controllable heat output. Living up to its name, this stove provides a spectacular display of the soaring flames thanks to its tall firebox and large viewing window.

| Key Facts | |
|-----------------------------------|-------------------|
| High efficiency | up to 85% |
| Multi-fuel | ✓ |
| Wood | ✓ |
| Approved for Smoke Control Areas | ✓ |
| Cleanburn | ✓ |
| Airwash | ✓ |
| Ceramic glass top (optional) | ✓ |
| Integral ceramic glass plinth | ✓ |
| Nominal heat output and range | 4.9kW (2.5 - 7kW) |
| Maximum log length | 13" (330mm) |
| Room vent not normally required** | ✓ |
| Boiler option | Х |
| Flue outlet | 5" top or rear |
| Stove bench compatible | ✓ |

^{**}For more information on room vents, please see page 122

Product Codes

| Wood | VW-5TW1 |
|----------------------------------|--------------|
| Multi-fuel | VW-5TMF1 |
| Glass top plate (top flue exit) | VW-5GB |
| Glass top plate (rear flue exit) | VW-5GBR |
| Stainless Steel Handle Set | VW-HANDLE-SS |
| Heat Shield Kit | VW-5THSK |
| Ash Caddy | 4228 |
| Stove benches | See page 123 |



Metallic Black







Community Design Application

Number 001202600







View 5T Midline

The View 5T Midline shares the same benefits of the View 5T but features a stylish integral log store base for added impact. Increasing the height of the stove as well as providing a convenient place to store logs, the View 5T Midline creates a stunning focal point wherever it is placed.

| Key Facts | |
|----------------------------------|-------------------|
| High efficiency | up to 85% |
| Multi-fuel | ✓ |
| Wood | ✓ |
| Approved for Smoke Control Areas | ✓ |
| Cleanburn | ✓ |
| Airwash | ✓ |
| Ceramic glass top (optional) | ✓ |
| Nominal heat output and range | 4.9kW (2.5 - 7kW) |
| Maximum log length | 13" (330mm) |
| Room vent not normally required* | ✓ |
| Boiler option | Х |
| Flue outlet | 5" top or rear |
| Stove bench compatible | ✓ |





Product Codes

| Wood | VW-5TMIDW1 |
|----------------------------------|--------------|
| Multi-fuel | VW-5TMIDMF1 |
| Glass top plate (top flue exit) | VW-5GB |
| Glass top plate (rear flue exit) | VW-5GBR |
| Stainless Steel Handle Set | VW-HANDLE-SS |
| Heat Shield Kit | VVV-5THSK |
| Ash Caddy | 4228 |



* For more information on room vents, please see page 122

Metallic Black


Multi-fuel viewing window is shown on page 88.





Design Features

- 1 5mm heavy duty steel body.
- 2 Easy fit flue connection through stove.
- **3** High density, thermal brick liner system.
- **4** Cast iron air-tight door with integrated primary air control slider.
- 5 Integrated Airwash control slider to maintain a cleaner glass window.
- Heated air jets from Cleanburn ports burn hydrocarbons in smoke.
- 7 High output boiler version also available.
- 8 Optional top glass plate.
- 9 Riddling system.



View 7 Inset Convector

up to 070/

5" top

The contemporary View stoves range has been expanded to include an inset convector fireplace offering many of the heating advantages of a freestanding stove. Incorporating Stovax's exceptional Cleanburn and convection systems, the multi-fuel View 7 Inset Convector provides up to 4 times more heating efficiency than a standard open fire; giving greater combustion control, increased heat outputs and lower fuel costs. An integral boiler version is also available, producing up to 30,000 BTU's of hot water (see page 116).

| High efficiency | up to 87% |
|-----------------------------------|-----------------------------|
| Multi-fuel | 1 |
| Approved for Smoke Control Areas | 1 |
| Cleanburn | 1 |
| Airwash | ✓ |
| Ceramic glass top (optional) | 1 |
| Radiant heat + convection systems | ✓ |
| Nominal heat output and range | 7kW (3 - 8kW) |
| Maximum log length | 12 ^{3/4} " (325mm) |
| | |

Product Codes

| Multi-fuel | VW-7NMF1 |
|----------------------------|--------------|
| Glass top plate | VW-7NGB |
| Stainless Steel Handle Set | VW-HANDLE-SS |



Metallic Black



Flue outlet

Key Facts




Integral Boiler version (see page 116)







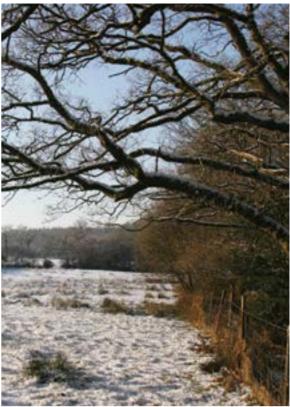

View 8

The largest of the View range, the View 8 is designed to provide high efficiency heating for contemporary homes as well as creating an outstanding focal point for your living space. Choose from either the woodburning only model or the multi-fuel version, the latter incorporating a riddling grate to allow you to burn smokeless fuels. An optional glass top is also available to complement the glass on the plinth beneath the stove as well as an integral boiler version capable of producing up to 34,000 BTU's of hot water (see pages 116 - 117).

Key Facts

| High efficiency | up to 81% |
|--|-----------------------------|
| Multi-fuel (with external riddling) | ✓ |
| Wood | √ |
| Cleanburn | √ |
| Airwash | √ |
| Ceramic glass top (optional) | ✓ |
| Integral boiler version available (page 117) | ✓ |
| Integral ceramic glass plinth | ✓ |
| Nominal heat output and range | 8kW (4 - 11kW) |
| Maximum log length | 15 ^{3/4} " (400mm) |
| Flue outlet | 6" top or rear |
| Stove bench compatible | ✓ |

Product Codes

| Wood | VW-8W1 |
|----------------------------------|--------------|
| Multi-fuel | VW-8MF1 |
| Glass top plate (top flue exit) | VW-8GB |
| Glass top plate (rear flue exit) | VW-8GBR |
| Ash Caddy | 4230 |
| Stainless Steel Handle Set | VW-HANDLE-SS |
| Stove benches | See page 123 |



Metallic Black









View 8 Midline

Increasing the vertical presence of these large format woodburning and multi-fuel stoves, the View 8 Midline features an integral log store that elevates the expansive firebox and widescreen flame view. The View 8 Midline is a great choice for more spacious settings that will benefit from the high efficiency 8kW heat output as well as the stove's impressive size. Depending on your preferences, the View 8 range can be styled with a number of optional upgrades such as stainless steel air controls and striking glass top plates.

| Key | Facts |
|------|---------|
| Jiah | officio |

| High efficiency | up to 81% |
|-------------------------------------|-----------------------------|
| Multi-fuel (with external riddling) | ✓ |
| Wood | ✓ |
| Cleanburn | ✓ |
| Airwash | ✓ |
| Ceramic glass top (optional) | ✓ |
| Nominal heat output and range | 8kW (4 - 11kW) |
| Maximum log length | 15 ^{3/4} " (400mm) |
| Flue outlet | 6" top or rear |

Product Codes

| Wood | VW-8MIDW1 |
|----------------------------------|--------------|
| Multi-fuel | VW-8MIDMF1 |
| Glass top plate (top flue exit) | VW-8GB |
| Glass top plate (rear flue exit) | VW-8GBR |
| Ash Caddy | 4230 |
| Stainless Steel Handle Set | VW-HANDLE-SS |
| Stove benches | See page 123 |



Metallic Black











Vision Small





The sleek looks of the Vision Small encapsulate the defining characteristics of this range of ultra-contemporary stoves. Featuring a stunning black glass door that gives you the best possible view of your fire, this compact and stylish stove gives a generous heat output of up to 5kW. With many optional extras available such as the Ceramic glass top or plinth with matching glass front, your styling possibilities are extended even further. Vision Small stoves* are engineered to meet forthcoming Ecodesign low emission standards and produce minimal flue gases (for more information see page 68).

| Key Facts | |
|---|----------------|
| High efficiency | up to 81% |
| Multi-fuel | ✓ |
| Wood | ✓ |
| Approved for Smoke Control Areas* | ✓ |
| Ecodesign compliant with forthcoming regulations on CO, Particulates, OGC's and NOx emissions | √ (Wood model) |
| Cleanburn | ✓ |
| Airwash | ✓ |
| Optional dedicated external air kit | ✓ |
| Ceramic glass top (optional) | ✓ |
| Glass fronted plinth (optional) | ✓ |
| Nominal heat output and range | 5kW (2 - 7kW) |
| Maximum log length | 11" (280mm) |
| Room vent not normally required** | ✓ |
| Flue outlet | 5" top or rear |
| Stove bench compatible | ✓ |
| | |

^{*} When fitted with a Smoke Control Kit for multi-fuel models.

| Product Codes | Wood Model | MF Model |
|-----------------------------------|--------------|---------------------------|
| Wood stove | RVN-SMW-E | - |
| Multi-fuel stove | - | RVN-SMM |
| Glass top plate (top flue exit) | RVN-SMGB | RVN-SMGB |
| Glass top plate (rear flue exit) | RVN-SMGBR | RVN-SMGBR |
| Glass Fronted Plinth Unit | RVN-SMPG-E | RVN-SMPG-E |
| MF [†] Smoke Control Kit | - | RVN-SMMSCKIT [†] |
| External Air Kit | SMAIR-E | RVN-SMAIR |
| Heat Shield Kit | RVN-SMHSK-E | RVN-SMHSK |
| 5" Decorative Flue Cover | RVAC150B | RVAC150B |
| Stove benches | See page 123 | |



[†]MF – Multi-fuel model. The Vision Small Woodburning model is Smoke Control Approved as standard and does not require an additional Smoke Control Kit

Multi-fuel model is shown on page 123.









^{**}For more information on room vents, please see page 122

[‡] Woodburning models only





Vision Small T





Sharing the compact footprint of the Small model, as well as the Ecodesign Ready Cleanburn combustion systems, the woodburning T version offers a taller flame picture for increased appeal. An alternative take on the standard stove shape, the Small T's portrait proportions make it an eye-catching choice wherever it is installed.

| Key Facts | |
|---|-----------------|
| High efficiency | up to 78% |
| Wood | 1 |
| Approved for Smoke Control Areas | 1 |
| Ecodesign compliant with forthcoming regulations on CO, Particulates, OGC's and NOx emissions | ✓ |
| Cleanburn | ✓ |
| Airwash | 1 |
| Optional dedicated external air kit | ✓ |
| Ceramic glass top (optional) | ✓ |
| Glass fronted plinth (optional) | ✓ |
| Nominal heat output and range | 4.8kW (2 - 7kW) |
| Maximum log length | 11" (280mm) |
| Room vent not normally required** | ✓ |
| Flue outlet | 5" top or rear |
| Stove bench compatible | ✓ |

| Wood Model |
|--------------|
| RVN-SMTW-E |
| RVN-SMGB |
| RVN-SMGBR |
| RVN-SMPG-E |
| SMAIR-E |
| RVN-SMTHSK-E |
| RVAC150B |
| See page 123 |
| |



Metallic Black









^{**}For more information on room vents, please see page 122







Vision Midi





Featuring the Vision range's signature clean, geometric form and reflective detailing, the Vision Midi offers an ample heat output of up to 5kW for the woodburning version and 6.5kW for the multi-fuel version. There are many optional extras to enhance your Vision Midi stove, including an external air kit that allows air to be drawn from the outside and therefore minimises drafts in your room. Styling options include the choice of a gloss black flue pipe, ceramic glass top, glass plinth base and a range of mounting benches that extend your individual styling options.

| Key Facts | |
|---|--|
| High efficiency | up to 78% |
| Multi-fuel | ✓ |
| Wood | ✓ |
| Approved for Smoke Control Areas* | √ |
| Ecodesign compliant with forthcoming regulations on CO, Particulates, OGC's and NOx emissions | ✓ (Wood model) |
| Cleanburn | ✓ |
| Airwash | ✓ |
| Optional dedicated external air kit | ✓ |
| Ceramic glass top (optional) | ✓ |
| Glass fronted plinth (optional) | ✓ |
| Nominal heat output & range | WB: 5kW (2.5 - 7kW) MF: 6.5kW (2.5 - 8.5kW) |
| Maximum log length | 13" (330mm) |
| Room vent not normally required** | ✓ |
| Flue outlet | 5" top or rear |
| Stove bench compatible | ✓ |

| Product Codes | Wood Model | MF Model |
|-----------------------------------|--------------|----------------------------|
| Wood stove | RVN-MIDW-E | - |
| Multi-fuel stove | - | RVN-MIDM |
| Glass top plate (top flue exit) | RVN-MIDGB | RVN-MIDGB |
| Glass top plate (rear flue exit) | RVN-MIDGBR | RVN-MIDGBR |
| Glass Fronted Plinth Unit | RVN-MIDPG-E | RVN-MIDPG-E |
| MF [†] Smoke Control Kit | - | RVN-MIDMSCKIT [†] |
| External Air Kit | MIDAIR-E | RVN-MIDAIR |
| Heat Shield Kit | RVN-MIDHSK-E | RVN-MIDHSK |
| 5" Decorative Flue Cover | RVAC150B | RVAC150B |
| Stove benches | See page 123 | |



[†]MF – Multi-fuel model. The Vision Midi Woodburning model is Smoke Control Approved as standard and does not require an additional Smoke Control Kit

Additional images including multi-fuel model is shown on page 27.









^{*} When fitted with a Smoke Control Kit for multi-fuel models.

^{**}For more information on room vents, please see page 122

[‡] Woodburning models only







Vision Midi T





The Vision Midi T offers a taller version of the Midi for a more expansive flame picture. This woodburning model features one of the most advanced Cleanburn combustion systems available, making it an exceptionally environmentally friendly stove option.

All models in the Vision range can be enhanced with a matching ceramic glass top, glass plinth as well as a gloss flue pipe if desired.

| Key Facts | |
|---|-----------------|
| High efficiency | up to 80% |
| Wood | ✓ |
| Approved for Smoke Control Areas | ✓ |
| Ecodesign compliant with forthcoming regulations on CO, Particulates, OGC's and NOx emissions | ✓ (Wood model) |
| Cleanburn | ✓ |
| Airwash | ✓ |
| Optional dedicated external air kit | ✓ |
| Ceramic glass top (optional) | ✓ |
| Glass fronted plinth (optional) | ✓ |
| Nominal heat output and range | 5kW (2.5 - 7kW) |
| Maximum log length | 11" (330mm) |
| Room vent not normally required** | ✓ |
| Flue outlet | 5" top or rear |
| Stove bench compatible | ✓ |

| Product Codes | Wood Model |
|----------------------------------|---------------|
| Wood stove | RVN-MIDTW-E |
| Glass top plate (top flue exit) | RVN-SMGB |
| Glass top plate (rear flue exit) | RVN-SMGBR |
| Glass Fronted Plinth Unit | RVN-MIDPG-E |
| External Air Kit | MIDAIR-E |
| Heat Shield Kit | RVN-MIDTHSK-E |
| 5" Decorative Flue Cover | RVAC150B |
| Stove benches | See page 123 |



Metallic Black









^{**}For more information on room vents, please see page 122

[‡] Woodburning models only



Vision Medium





Featuring all the hallmarks of the Vision range, the Medium is a large format stove with a stunning, expansive flame picture and high efficiency heat output of up to 9kW. Designed to meet future Ecodesign low emission standards[‡], this stylish stove is ultra-green burning for minimal environmental impact. The Vision Medium can be combined with either the impressive glass plinth or a stove bench to achieve outstanding style and powerful heating potential in equal measure.

| Key Facts | |
|---|--------------------------------------|
| High efficiency | up to 79% |
| Multi-fuel | ✓ |
| Wood | √ |
| Approved for Smoke Control Areas* | ✓ |
| Ecodesign compliant with forthcoming regulations on CO, Particulates, OGC's and NOx emissions | √ (Wood model) |
| Cleanburn | 1 |
| Airwash | ✓ |
| Optional dedicated external air kit | ✓ |
| Ceramic glass top (optional) | ✓ |
| Glass fronted plinth (optional) | ✓ |
| Nominal heat output and range (Wood) Nominal heat output and range (Multi-fuel) | 7.5kW (5 - 11kW) 9.0kW (5 - 11kW) |
| Maximum log length | 17" (430mm) |
| Room vent not normally required** | √ |
| Flue outlet | 6" top or rear |
| Stove bench compatible | ✓ |

^{*} When fitted with a Smoke Control Kit for multi-fuel models.

| Product Codes | Wood Model | MF Model |
|-----------------------------------|--------------|----------------------------|
| Wood stove | RVN-MEDW-E | - |
| Multi-fuel stove | - | RVN-MEDM |
| Glass top plate (top flue exit) | RVN-MEDGB | RVN-MEDGB |
| Glass top plate (rear flue exit) | RVN-MEDGBR | RVN-MEDGBR |
| Glass Fronted Plinth Unit | RVN-MEDPG-E | RVN-MEDPG-E |
| MF [†] Smoke Control Kit | - | RVN-MEDMSCKIT [†] |
| External Air Kit | MEDAIR-E | RVN-MEDAIR |
| Heat Shield Kit | RVN-MEDHSK-E | RVN-MEDHSK |
| 6" Decorative Flue Cover | RVAC220B | RVAC220B |
| Stove benches | See page 123 | |
| | | |



[†]MF – Multi-fuel model. The Vision Medium Woodburning model is Smoke Control Approved as standard and does not require an additonal Smoke Control Kit

Additional image of multi-fuel model is shown on page 68.









^{**}When fitted with a dedicated external air kit. For more information on room vents, please see page 122

[‡] Woodburning models only. For more information see page 68.





Studio Freestanding



The magnificent Studio range offers a new dimension in woodburning fires, with unparalleled widescreen flame views. Whether placed in a cosy inglenook or standing boldly in the room, the Studio Freestanding fires provide a sublime statement in living spaces of all proportions. Further complemented by additional options including a black glass top plate and decorative square flue cover, these fires are at the pinnacle of contemporary tastes and fireplace technology.

For more information you can request a separate brochure from your local retailer, or alternatively can be viewed online at www.stovax.com.









Riva Freestanding



Finished in your choice of Metallic Black or Storm Metallic, the three Riva Freestanding stoves are truly distinctive in appearance, with exceptional heat outputs and amazing ease of control. These striking stoves offer all the cutting-edge features you would expect from a modern stove, including the very latest Cleanburn combustion systems.

More information on the Riva Freestanding stoves and their built-in counterparts is available in a separate, dedicated brochure which can be requested from your local retailer, or viewed online at www.stovax.com.





Freestanding Elise

The Stovax Freestanding Elise fire range presents an additional selection of contemporary styled, high efficiency woodburning and multi-fuel stoves at the forefront of innovation.

Presented in either Glass or Steel, Elise fires feature state-of-the-art airflow and combustion systems, producing magnificent flame visuals whilst lowering emissions to an absolute minimum.

The Elise's progressive design makes it not only one of today's cleanest burning fires but also compliant with tomorrow's Ecodesign efficiency and emission standards for 2022. Further information about this exciting range can be found in a separate, dedicated brochure which can be requested from your local retailer or viewed online at www.stovax.com.





Built-In Fires



Stovax offer a variety of cutting edge built-in fires across the Studio, Riva and Elise ranges. With both woodburning and multi-fuel options available, these built-in fires have all the appeal of a traditionally fuelled fire but provide exemplary technological features and sleek, contemporary aesthetics. Each range offers a wide choice of sizes and complementary frame styles, allowing you to find the perfect built-in fire for your home.

More information can be found in our separate brochures for these ranges which can be requested from your local retailer or can be viewed online at www.stovax.com.









High Output Boiler Stoves

Four models within the Stockton range, along with the View 7HBi and 8HB from the new contemporary View range, have been specifically designed to supply your domestic hot water and central heating requirements or augment your existing heating system via 'link up' technology. Whatever your choice, you will enjoy all the atmosphere of a real fire plus exceptional heating performance throughout your home.

When providing hot water and central heating, each stove is capable of feeding an average 8,000 BTU hot water cylinder and depending on the model, up to 19 radiators. The exact number of radiators will depend upon how many rooms you wish to heat and the sizes of those rooms. Radiators also come in a variety of sizes/capacities. For example, a typical 400mm high x 1000mm wide, single panel radiator requires 2500BTU/hr. You should always consult a qualified solid fuel heating engineer to ensure the stove can meet your requirements.

Alternatively, you can 'link up' a Stovax High Output Boiler with your existing or proposed heating system to reduce your reliance on gas or oil and help decrease overall heating fuel costs. There are ways to link with conventional oil or gas central heating, gas or oil sealed heating systems, combi boilers, underfloor heating and even solar panels to provide flexible, cost-effective solutions. Stovax produces a 'link up' guide showing typical arrangements and covering some frequently asked questions. You may find it useful to download this from www.stovax.com/linkup before discussing your requirements with a qualified heating engineer.

Stovax HB boiler stoves are designed for multi-fuel use and incorporate a riddling grate. This is because smokeless fuels tend to provide greater calorific values. However, should you wish to reduce your CO₂ emissions then you can also burn a combination of smokeless fuels and logs together. Should you prefer to burn wood only, you can still achieve good performance but, as logs burn best with slightly different firebox characteristics, we recommend you purchase the optional log tray or the new dedicated woodburning only models for the Stockton 11HB and 14HB.











Stockton Boiler Stoves Design Features

- 1 5mm and 10mm heavy duty steel body
- 2 Excellent heat output to water when burning solid fuels or wood
- 3 4 x 1" BSP boiler tappings for flexible, efficient connection to your hot water circuits
- 4 Extensive water jacket on 4 sides for maximum transmission of heat to water
- 5 Highly developed boiler flue baffle system ensures maximum heating efficiency
- 6 Top or rear flue exit (7HBi top exit only)
- 7 Specially designed reciprocating grate ensures effective removal of ashes*
- 8 Large ash collection tray
- 9 Discreet external riddling socket with removable tool*
- 10 Unique heated air jets from cleanburn ports burn hydrocarbons in smoke.
 (UK Patent Application GB2495920)
- 11 Levelling system in each foot to ensure stability on uneven surfaces
- 12 Primary air controls to manually adjust the running temperatures
- **13** Airwash system with boost setting to help keep glass clear and controls the running temperature when burning logs
- 14 Thermostatic control to maintain desired running temperatures
- **15** Optional woodburning tray for multi-fuel models (not illustrated)

Stockton Boiler Stoves

| Stockton Boiler Stoves Key Facts | 7НВі | 8HB | 11HB | 14HB |
|--|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| Multi-fuel with external riddling | ✓ | ✓ | ✓ | ✓ |
| Dedicated woodburning version | Х | Х | ✓ | / |
| Airwash System | ✓ | ✓ | ✓ | √ |
| Unique Cleanburn System (UK Patent Application GB2495920) | ✓ | ✓ | ✓ | ✓ |
| CE Approved | ✓ | ✓ | ✓ | ✓ |
| Nominal heat output to room | 4.0kW | 4.9kW | 7.0kW | 7.0kW |
| Nominal heat output to boiler | 7.4kW | 8.2kW | 11.0kW | 15.0kW |
| Maximum system rating | 8.8kW (30,000BTU) | 10kW (34,000BTU) | 13kW (45,000BTU) | 18kW (62,000BTU) |
| Radiator capabilities - example No. of 2500BTU radiators + 8000BTU cylinder | 8 radiators | 9 radiators | 15 radiators | 19 radiators |
| Maximum log length | 12 ^{3/4} " (325mm) | 15 ^{3/4} " (400mm) | 19 ^{1/2} " (500mm) | 23 ^{1/2} " (600mm) |
| Optional log tray | ✓ | ✓ | ✓ | ✓ |
| Flue outlet | 5" top | 6" top or rear | 6" top or rear | 6" top or rear |
| Choice of four colours | ✓ | ✓ | ✓ | ✓ |
| Thermostatic Control | √ | √ | √ | ✓ |

Product Codes


| Colour | Matt Black | Metallic Blue | Metallic Brown | Metallic Green |
|---|--|---------------|----------------|----------------|
| 7HB - Inset multi-fuel with low canopy | 7125HB | 7125HBBL | 7125HBBR | 7125HBGR |
| 8HB - Multi-fuel with flat top | ST8HBMF2 | ST8HBMF2BL | ST8HBMF2BR | ST8HBMF2GR |
| 11HB - Multi-fuel with flat top | ST11HBMF2 | ST11HBMF2BL | ST11HBMF2BR | ST11HBMF2GR |
| 11HB - Woodburning with flat top | ST11HBW2 | ST11HBW2BL | ST11HBW2BR | ST11HBW2GR |
| 14HB - Multi-fuel with flat top | ST14HBMF2 | ST14HBMF2BL | ST14HBMF2BR | ST14HBMF2GR |
| 14HB - Woodburning with flat top | ST14HBW2 | ST14HBW2BL | ST14HBW2BR | ST14HBW2GR |
| Thermostat - 7HB Inset | STATIN suitable for all colour options | | | |
| Thermostat - 8HB, 11HB & 14HB | STATST suitable for all colour options | | | |
| Woodburning tray 7HB Inset - Multi-fuel | 7125WT suitable for all colour options | | | |
| Woodburning tray 8HB - Multi-fuel | 8HBWT suitable for all colour options | | | |
| Woodburning tray 11HB - Multi-fuel | 11HBWT suitable for all colour options | | | |
| Woodburning tray 14HB - Multi-fuel | 14HBWT suitable for all colour options | | | |
| | | | | |

^{*} Multi-fuel models only.



| View Boiler Stove Key Facts | 7НВі | 8HB |
|---|-----------------------------|-----------------------------|
| Multi-fuel with external riddling | ✓ | ✓ |
| Airwash | ✓ | ✓ |
| Unique Cleanburn System (UK Patent Application GB2495920) | ✓ | ✓ |
| CE Approved | ✓ | ✓ |
| Nominal heat output to room | 4.0kW | 4.9kW |
| Nominal heat output to boiler | 7.4kW | 8.2kW |
| Maximum system rating | 8.8kW (30,000BTU) | 10.0kW (34,000BTU) |
| Radiator capabilities example: Number of 2500BTU radiators + 8000BTU cylinder | 8 Radiators | 9 Radiators |
| Maximum log length | 12 ^{3/4} " (325mm) | 15 ^{3/4} " (400mm) |
| Optional log tray | ✓ | ✓ |
| Flue outlet | 5" Тор | 6" Top & Rear |
| Optional Ceramic glass top | ✓ | ✓ |
| Integral ceramic glass plinth | ✓ | ✓ |
| Thermostatic Control | ✓ | ✓ |
| Stove bench compatible | Х | 1 |

View Boiler Stoves

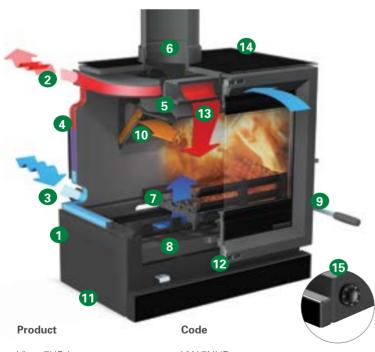

| View 7HB Inset | VW-7NHB |
|----------------------------|--------------|
| View 8HB | VW-8HBMF1 |
| Thermostat - 7HBi | STATIN |
| Thermostat - 8HB | STATST |
| Woodburning tray - 7HBi | 7125WT |
| Woodburning tray - 8HB | 8HBWT |
| Stainless Steel Handle Set | VW-HANDLE-SS |
| Stove benches | See page 123 |
| | |



Metallic Black

View Boiler Stove Design Features

- 1 5mm and 8mm heavy duty steel body.
- 2 Excellent heat output to water when burning solid fuels or wood.
- **3** 4 x 1" BSP boiler tappings for flexible efficient connection to your hot water circuits.
- **4** Extensive water jacket on 4 sides of stove to ensure maximum transmission of heat to water.
- **5** Highly developed boiler flue baffle system to ensure maximum heating efficiency.
- 6 Top or rear flue exit.
- 7 Specially designed reciprocating grate ensures effective removal of ash from the fuel bed.
- 8 Large ash collection tray.
- **9** Discreet external riddling socket, with removable tool.
- 10 Unique heated air jets from cleanburn ports burn hydrocarbons in smoke (UK Patent Application GB2495920)
- **11** Levelling system to ensure complete stability on uneven surfaces.
- **12** Primary air controls to manually adjust the running temperatures.
- 13 Airwash system with boost setting helps to keep the glass clear and controls the running temperature when burning wood.
- 14 Optional glass top plates in top & rear flue.
- 15 Thermostatic control to maintain desired running temperatures.
- 16 Optional woodburning tray (not illustrated).
- 17 Stainless steel door handle, with self-locking function (not illustrated).







Electric Stoves



Several of the stoves in this brochure are also available as electric versions. Simply plug in and switch on for that 'real fire' look, brought alive with unique VeriFlame™ technology which provides a combination of flame speed and glow level. The individually handpainted 'logs' perfectly mirror the atmosphere and attraction of a real woodburning stove.

Operation is simple too as the stove's remote control not only allows VeriFlame™ selection but also adjustment of the heat combinations. The amount of heat produced can be altered between 1kW and 2kW depending on the warmth required. You can even enjoy the flames without heat!

For more details, please see the latest 'Electric Fires & Stoves' brochure which features an exciting range of both traditional and contemporary electric fires and stoves. The brochure is available from our sister company, Gazco, and can be requested from your retailer. Alternatively, you can view or download the complete range online by visiting **www.gazco.com** or scanning this QR code with your mobile device.





Vision Midi Electric





Gas Stoves

Gazco additionally offer a wide selection of traditional and modern gas stoves. Please ask your retailer for details. Alternatively, scan this QR code or visit **www.gazco.com** to view or download the complete range.















Electric Steel Manhattan

Vision Medium

Electric Stockton 5





Midnight

Laurel

Matt

Flue Pipe

Matching Matt Black and Coloured Enamel Flue Pipe

For the fully colour co-ordinated installation of your Brunel or Huntingdon stove and optimum performance, we offer high quality matt black, gloss black and coloured enamel flue pipes. Brunel 1A, Brunel 2CB, Huntingdon 25 and Huntingdon 28 connect to a 5" flue pipe, while the Brunel 3CB, Huntingdon 30, Huntingdon 35 and Huntingdon 40 connects to a 6" flue pipe. All components are listed in the table.

For Regency flue pipe, please refer to page 126.

For View flue pipe, please refer to pages 127 - 130.

For Vogue flue pipe, please refer to page 130 - 131.

For Vision flue pipe, please refer to pages 132 - 133.

For Stockton flue pipe, please refer to pages 133 - 140.

For Riva Plus flue pipe, please refer to pages 140 - 141.

Owing to different production processes, we cannot guarantee a perfect match between pipe and stove.

| Gloss Black Enamel Flue Pipe | Product Code |
|--|---------------------|
| 5" diameter, 1' straight no door | 4500GB |
| 5" diameter, 2' straight no door | 4501GB |
| 5" diameter, 3' straight no door | 4502GB |
| 5" diameter, 135° bend with door | 4512GB |
| 5" diameter, 135° bend without door | 4537GB |
| 5" diameter, 90° tee piece with endcap | 4516GB |
| 6" diameter, 1' straight no door | 4600GB |
| 6" diameter, 2' straight no door | 4601GB |
| 6" diameter, 3' straight no door | 4602GB |
| 6" diameter, 135° bend with door | 4612GB |
| 6" diameter, 135° bend without door | 4637GB |
| 6" diameter, 90° tee piece with endcap | 4616GB |

| | Black Enamel | Blue Enamel | Green Enamel | lvory Enamel |
|-----------------------------|-----------------|----------------|-----------------|-----------------|
| 5" diameter | | | | |
| 1' straight with door | 4504 | 4504MBL | 4504LG | 4504IV |
| 2' straight with door | 4505 | 4505MBL | 4505LG | 4505IV |
| 3' straight with door | 4506 | 4506MBL | 4506LG | 4506IV |
| 1' straight without door | 4500 | 4500MBL | 4500LG | 4500IV |
| 2' straight without door | 4501 | 4501MBL | 4501LG | 4501IV |
| 3' straight without door | 4502 | 4502MBL | 4502LG | 4502IV |
| 3' 7" straight without door | 4545 | - | - | - |
| 1' 3" - 2' 1" (telescopic) | 4542 | 4542MBL | 4542LG | - |
| 3' 4" - 4' 6" (telescopic) | 4540 | 4540MBL | 4540LG | - |
| Tee piece with end cap | 4516 | 4516MBL | 4516LG | 4516IV |
| 135° bend with door | 4512 | - | - | - |
| 110° bend with door | 4513 | - | - | - |
| 90° bend with door | 4514 | - | - | - |
| 150° bend with door | 4522 | - | - | - |
| 135° bend without door | 4537 | 4537MBL | 4537LG | 4537IV |
| 150° bend without door | 4538 | - | - | - |
| 6" diameter | | | | |
| 1' straight with door | 4604 | 4604MBL | 4604LG | 4604IV |
| 2' straight with door | 4605 | 4605MBL | 4605LG | 4605IV |
| 3' straight with door | 4606 | 4606MBL | 4606LG | 4606IV |
| 1' straight without door | 4600 | 4600MBL | 4600LG | 4600IV |
| 2' straight without door | 4601 | 4601MBL | 4601LG | 4601IV |
| 3' straight without door | 4602 | 4602MBL | 4602LG | 4602IV |
| 3' 7" straight without door | 4645 | - | - | - |
| 1' 3" - 2' 1" (telescopic) | 4642 | 4642MBL | 4642LG | - |
| 3' 4" - 4' 6" (telescopic) | 4640 | 4640MBL | 4640LG | - |
| Tee piece with end cap | 4616 | 4616MBL | 4616LG | 4616IV |
| 135° bend with door | 4612 | - | - | - |
| 110° bend with door | 4613 | - | - | - |
| 90° bend with door | 4614 | - | - | - |
| 150° bend with door | 4622 | - | - | - |
| 135° bend without door | 4637 | 4637MBL | 4637LG | 4637IV |
| 150° bend without door | 4638 | - | - | - |
| | | | | |











Accessories, stove care and important technical information

Care of Your Stove

To help you get the best performance from your stove and keep it in good condition, inside and out, Stovax offers a wide range of cleaning and maintenance products. Stovax also supplies a wide variety of fireplace accessories. Your Stovax retailer will be able to give you full details or you may view the complete range at www.stovax.com.

Product Improvement and Warranty

Stovax pursue a policy of constant product improvement. Products supplied may therefore differ in specification from those illustrated or described in this brochure, and you should always check the final specification with your Stovax retailer.

Your Stovax Expert Retailer will provide you with a Two Year Warranty for your new solid fuel stove. This can then be extended to a five year warranty, provided it has been registered with Stovax. During the registration process, the Expert Retailer details will be required for your Extended Warranty to be activated. Please note, this warranty excludes certain consumable parts and is dependant on your appliance being serviced by an appropriately qualified person 12 months after installation and annually thereafter. Stoves purchased outside of Stovax's Expert Retailer Network will carry a standard 12

month, non-extendable warranty. Full details of this warranty is set out to view on our website at **www.stovax.com**.

Important Safety & Technical Information

We recommend that a HETAS approved installer should undertake a site survey prior to purchase and it is a requirement that any Stovax Stove should be installed by an appropriately qualified HETAS approved installer.

All fires and stoves consume air as they burn. To comply with Building Regulations (Document J) you may need to install a fixed air vent to ensure adequate ventilation. Your Stovax retailer or HETAS installer will be able to advise on this. Furthermore, by law all installations also require a Carbon Monoxide monitor (such as product code 3045 available from Stovax).

You can also download detailed installation instructions prior to purchase from **www.stovax.com**.

Please note that all parts of these stoves, particularly the glass panel in the door, become extremely hot during operation and can result in serious injury and burns if touched. It is therefore recommended that a fireguard complying with BS 8423:2002 is used in the presence of young children, the elderly or infirm.

Stovax Heat Shields

Stovax offer a range of highly effective Heat Shields for the Stockton, Vogue, View and Vision stove ranges. These fantastic additions will allow a reduction in the distance to combustible materials at the rear and sides of the stoves as shown right. The Stovax Heat Shields not only maximise the available space within the room, but they also enable you to accomodate a wider range of materials in your interior design. For more information, please speak to your local Stovax retailer.

| Stove | Product Code | Distance from rear | Distance from sides |
|------------------|---------------------------------|--------------------|---------------------|
| Stockton 3 | ST3HSK | 350mm | 150mm |
| Stockton 4 | ST4HSK | 350mm | 150mm |
| Stockton 5 / 5ML | ST5HSK | 250mm | 150mm |
| Stockton 6 | ST6HSK | 300mm | 200mm |
| Stockton 7 | ST7HSK | 300mm | 200mm |
| View 3 | VW-3HSK | 400mm | 200mm |
| View 5 / 5ML | VW-5HSK | 300mm | 200mm |
| Vision Small | WB: RVN-SMHSK-E MF: RVN-SMHSK | 350mm | 100mm |
| Vision Midi | RVN-MIDHSK | 400mm | 100mm |
| Vision Medium | WB: RVN-MEDHSK-E MF: RVN-MIDHSK | 300mm | 50mm |
| Vogue Small | VG-SMHSK-E | 350mm | 100mm |
| Vogue Midi | RVN-MIDHSK | 400mm | 100mm |
| Vogue Medium | VG-MEDHSK-E | 300mm | 50mm |





Stove Benches

These versatile steel benches are compatible with the freestanding contemporary stoves shown within this brochure. With five widths and two heights, they offer greater design possibilities to accommodate your individual styling requirements. You can even use the space beneath for log storage!^Δ

| Design Features |
|--|
| Sturdy steel construction |
| Choice of 5 widths and 2 heights |
| Durable matt black finish |
| High: 450/1000/1200/1400/1800 x 350 x 420/465*mm (wxhxd) |
| Low: 450/1000/1200/1400/1800 x 250 x 420/465*mm (wxhxd) |
| Proportioned 60mm wide legs |
| Allows for central or offset stove positioning |

| Key Facts | Low | High |
|-----------------------------|--------------|-------------|
| Stove Bench 45 [†] | RVACLB45BHT | RVACB45BHT |
| Stove Bench 100 | RVACLB100BHT | RVACB100BHT |
| Stove Bench 120 | RVACLB120BHT | RVACB120BHT |
| Stove Bench 140 | RVACLB140BHT | RVACB140BHT |
| Stove Bench 180 | RVACLB180BHT | RVACB180BHT |

 $^{^\}dagger$ Suitable for View 3 & 5, Riva F40 and Vision Small & Midi & Vogue Midi only. Δ Logs are not to be stored directly beneath the stove position.

 $^{^{\}ast}$ A depth of 465mm applies to the 180 bench only.



The flue pipe connects your stove to the existing/new chimney system. The chimney system must meet the requirements of Building Regulations (Document J) and the stove fitted in accordance with the detailed installation instructions provided with each unit. You may also download these instructions prior to purchase from **www.stovax.com**.

Brunel 1A Connects with 5" flue pipe using: Size Without door door 4504 4500 1' straight 4505 4501 2' straight 3' straight 4506 4502 3' 7" straight 4545 1' 3" - 2' 1 4542 (telescopic) 3' 4" - 4' 6 4540

For coloured enamel flue pipe see page 120.

4516

Weight: 62kg 15'/8" 385mm 11'8", 430mm (B) 17'/8" 435mm (B) 17'/8" 430mm (B) 18'/8" 430mm (B) 18

95mm

Brunel 2CB

(telescopic)
Tee piece with


end cap

Connects with 5" flue pipe using:

| Size | With door | Without door |
|-------------------------------|--------------|-----------------|
| 1' straight | 4504 | 4500 |
| 2' straight | 4505 | 4501 |
| 3' straight | 4506 | 4502 |
| 3' 7" straight | | 4545 |
| 1' 3" - 2' 1" (telescopic) | | 4542 |
| 3' 4" - 4' 6" (telescopic) | | 4540 |
| Tee piece with | | 4516 |

For coloured enamel flue pipe codes see page 120.

Weight: 90kg

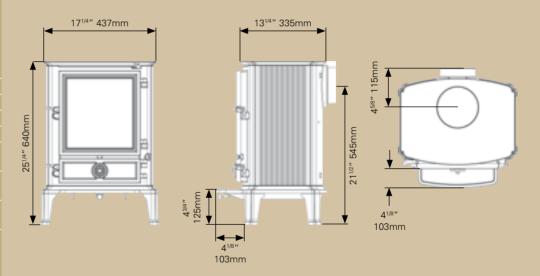

95mm


Brunel 3CB


Connects with 6" flue pipe using:

| Size | With door | Without door |
|-------------------------------|--------------|-----------------|
| 1' straight | 4604 | 4600 |
| 2' straight | 4605 | 4601 |
| 3' straight | 4606 | 4602 |
| 3' 7" straight | | 4645 |
| 1' 3" - 2' 1" (telescopic) | | 4642 |
| 3' 4" - 4' 6" (telescopic) | | 4640 |
| Tee piece with end cap | | 4616 |

For coloured enamel flue pipe codes see page 120.

Weight: 120kg

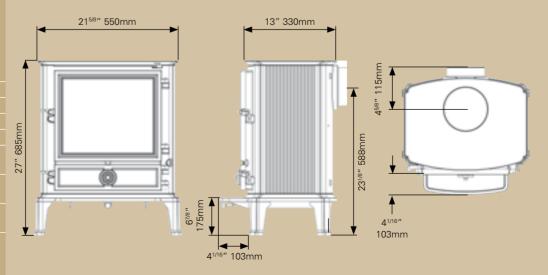

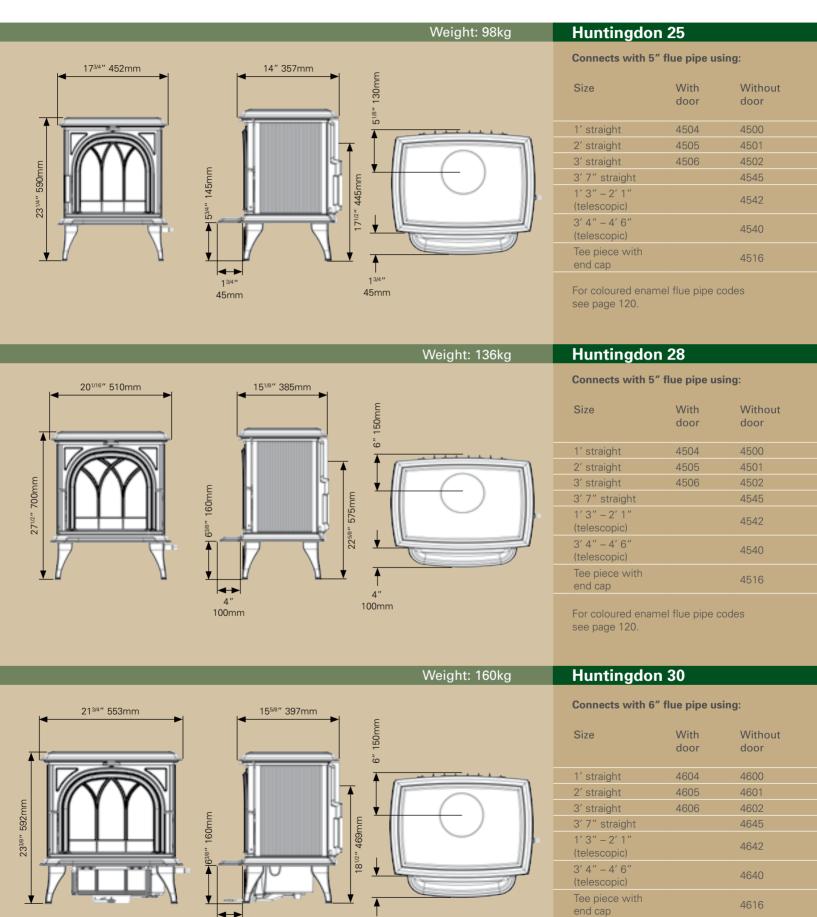

4^{1/8}" 105mm

105mm

For coloured enamel flue pipe codes

see page 120.

The flue pipe connects your stove to the existing/new chimney system. The chimney system must meet the requirements of Building Regulations (Document J) and the stove fitted in accordance with the detailed installation instructions provided with each unit. You may also download these instructions prior to purchase from **www.stovax.com**.


Huntingdon 35

Connects with 6" flue pipe using:

| Size | With door | Without door |
|-------------------------------|--------------|-----------------|
| 1' straight | 4604 | 4600 |
| 2' straight | 4605 | 4601 |
| 3' straight | 4606 | 4602 |
| 3' 7" straight | | 4645 |
| 1' 3" - 2' 1" (telescopic) | | 4642 |
| 3' 4" - 4' 6" (telescopic) | | 4640 |
| Tee piece with end cap | | 4616 |

For coloured enamel flue pipe codes see page 120.

Weight: 175kg

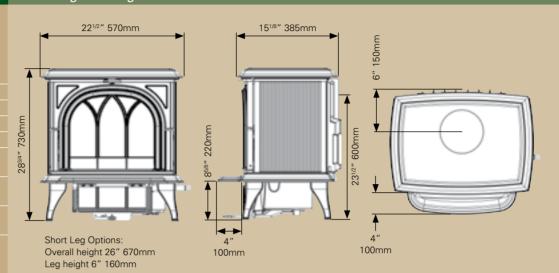


Huntingdon 40

Connects with 6" flue pipe using:

| Size | With door | Without door |
|-------------------------------|--------------|-----------------|
| 1' straight | 4604 | 4600 |
| 2' straight | 4605 | 4601 |
| 3' straight | 4606 | 4602 |
| 3' 7" straight | | 4645 |
| 1' 3" - 2' 1" (telescopic) | | 4642 |
| 3' 4" - 4' 6" (telescopic) | | 4640 |
| Tee piece with end cap | | 4616 |

For coloured enamel flue pipe see page 120.

Weight: 180kg

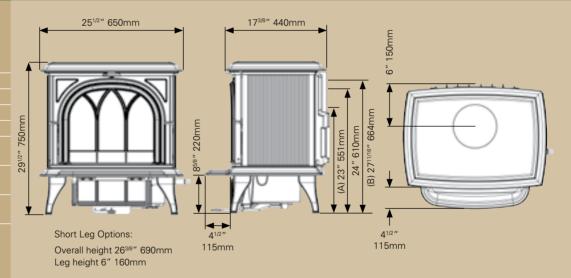

Regency Medium

Connects with 8" flue pipe using:




Straight Double Socket


1': 4808 2': 4809 3': 4810

Double Tee Piece with end cap

4817

Weight: 136kg

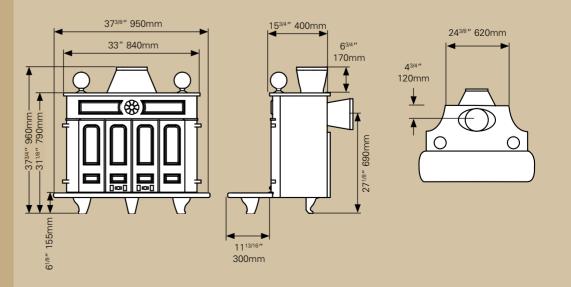

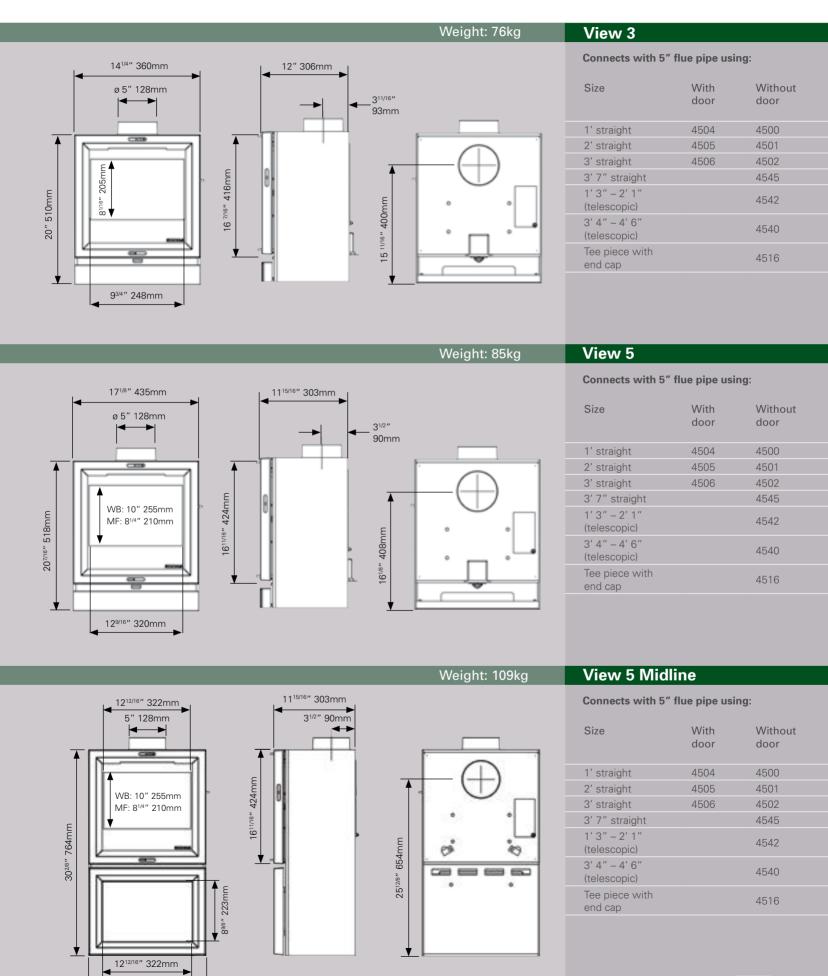

17^{1/8}" 435mm


The flue pipe connects your stove to the existing/new chimney system. The chimney system must meet the requirements of Building Regulations (Document J) and the stove fitted in accordance with the detailed installation instructions provided with each unit. You may also download these instructions prior to purchase from **www.stovax.com**.

View 5T

Connects with 5" flue pipe using:

| Size | With door | Without door |
|-------------------------------|--------------|-----------------|
| 1' straight | 4504 | 4500 |
| 2' straight | 4505 | 4501 |
| 3' straight | 4506 | 4502 |
| 3' 7" straight | | 4545 |
| 1' 3" - 2' 1" (telescopic) | | 4542 |
| 3' 4" - 4' 6" (telescopic) | | 4540 |
| Tee piece with end cap | | 4516 |

Weight: 88kg

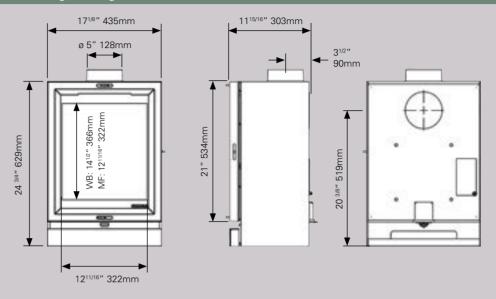


View 5T Midline

Connects with 5" flue pipe using:

| Size | With door | Without door |
|-------------------------------|--------------|-----------------|
| 1' straight | 4504 | 4500 |
| 2' straight | 4505 | 4501 |
| 3' straight | 4506 | 4502 |
| 3' 7" straight | | 4545 |
| 1' 3" - 2' 1" (telescopic) | | 4542 |
| 3' 4" - 4' 6" (telescopic) | | 4540 |
| Tee piece with end cap | | 4516 |


Weight: 114kg

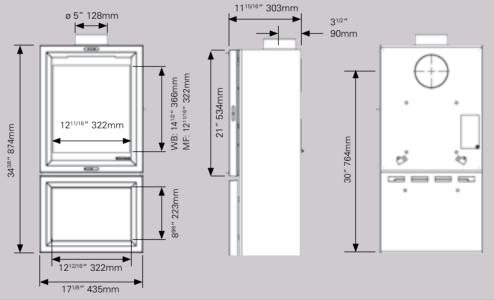


View 7 Inset Convector


Connects to register plate, flexible flue liner or flue pipe. See installation instructions.

Weight: 120kg

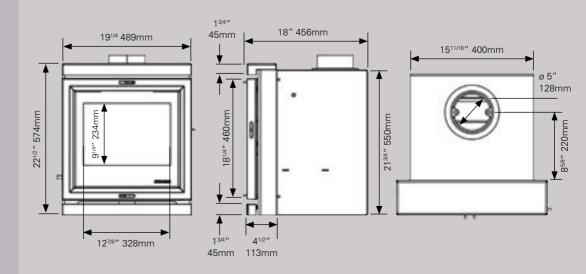

Weight: 137kg

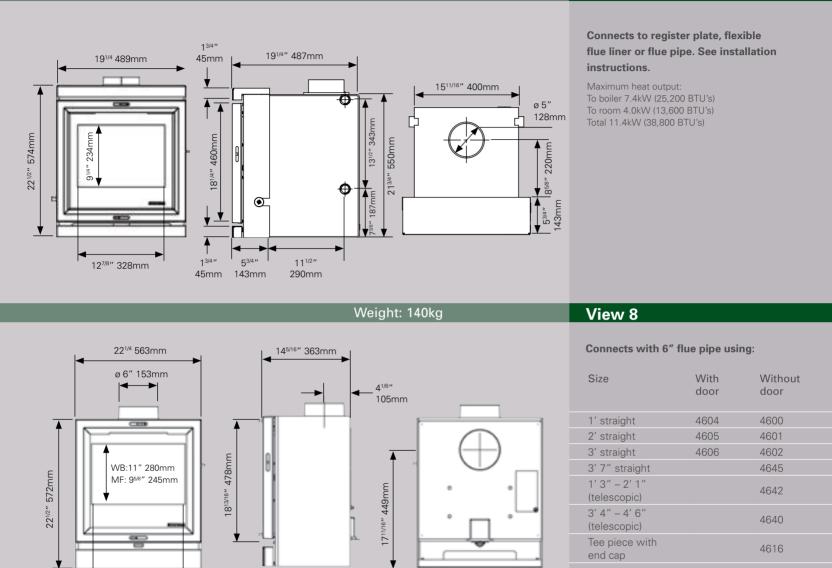

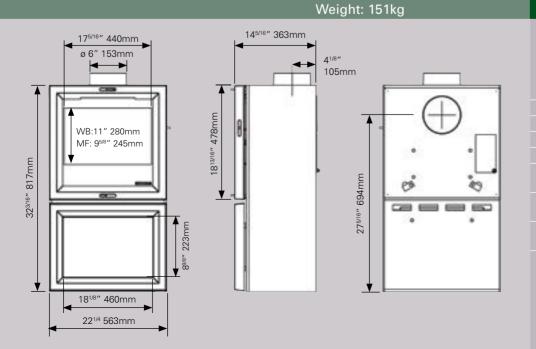

17^{5/16}" 440mm

View 8 Midline

| Connects | with | 6" | flue | pipe | using: |
|----------|------|----|------|------|--------|

View 7HB Inset Boiler

| Size | With door | Without door |
|-------------------------------|--------------|-----------------|
| 1' straight | 4604 | 4600 |
| 2' straight | 4605 | 4601 |
| 3' straight | 4606 | 4602 |
| 3' 7" straight | | 4645 |
| 1' 3" - 2' 1" (telescopic) | | 4642 |
| 3' 4" - 4' 6" (telescopic) | | 4640 |
| Tee piece with end cap | | 4616 |
| | | |

The flue pipe connects your stove to the existing/new chimney system. The chimney system must meet the requirements of Building Regulations (Document J) and the stove fitted in accordance with the detailed installation instructions provided with each unit. You may also download these instructions prior to purchase from **www.stovax.com**.


View 8HB

Connects with 6" flue pipe using:

| Size | With door | Without door |
|-------------------------------|--------------|-----------------|
| 1' straight | 4604 | 4600 |
| 2' straight | 4605 | 4601 |
| 3' straight | 4606 | 4602 |
| 3' 7" straight | | 4645 |
| 1' 3" - 2' 1" (telescopic) | | 4642 |
| 3' 4" - 4' 6" (telescopic) | | 4640 |
| Tee piece with end cap | | 4616 |

Maximum heat output: To boiler 8.2kW (28,000 BTU's) To room 4.9kW (16,700 BTU's) Total 13.1kW (44.700 BTU's)

Weight: 140kg

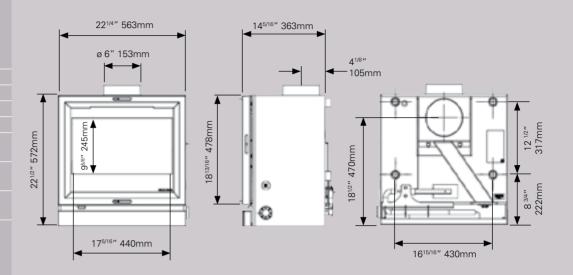


Vogue Small

Connects with 5" flue pipe using:

| ; | Size | With door | Without door |
|-----|-------------------------------|--------------|-----------------|
| | 1' straight | 4504 | 4500 |
| - 1 | 2' straight | 4505 | 4501 |
| (| 3' straight | 4506 | 4502 |
| (| 3' 7" straight | | 4545 |
| | 1' 3" - 2' 1" (telescopic) | | 4542 |
| | 3' 4" - 4' 6" (telescopic) | | 4540 |
| | Tee piece with end cap | | 4516 |

Weight: 71kg

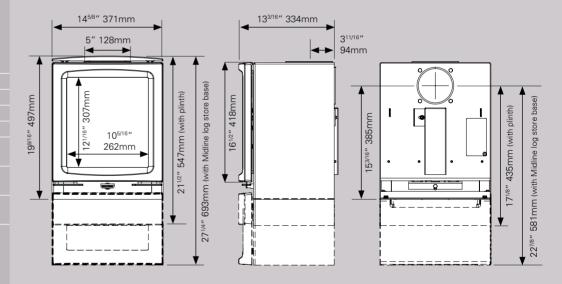



Vogue Small T

Connects with 5" flue pipe using:

| Size | With door | Without door |
|-------------------------------|--------------|-----------------|
| 1' straight | 4504 | 4500 |
| 2' straight | 4505 | 4501 |
| 3' straight | 4506 | 4502 |
| 3' 7" straight | | 4545 |
| 1' 3" - 2' 1" (telescopic) | | 4542 |
| 3' 4" - 4' 6" (telescopic) | | 4540 |
| Tee piece with | | 4516 |

Weight: 74kg

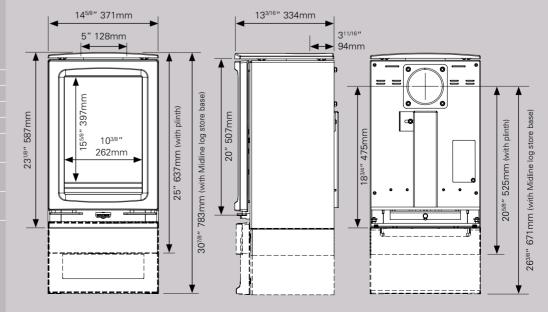

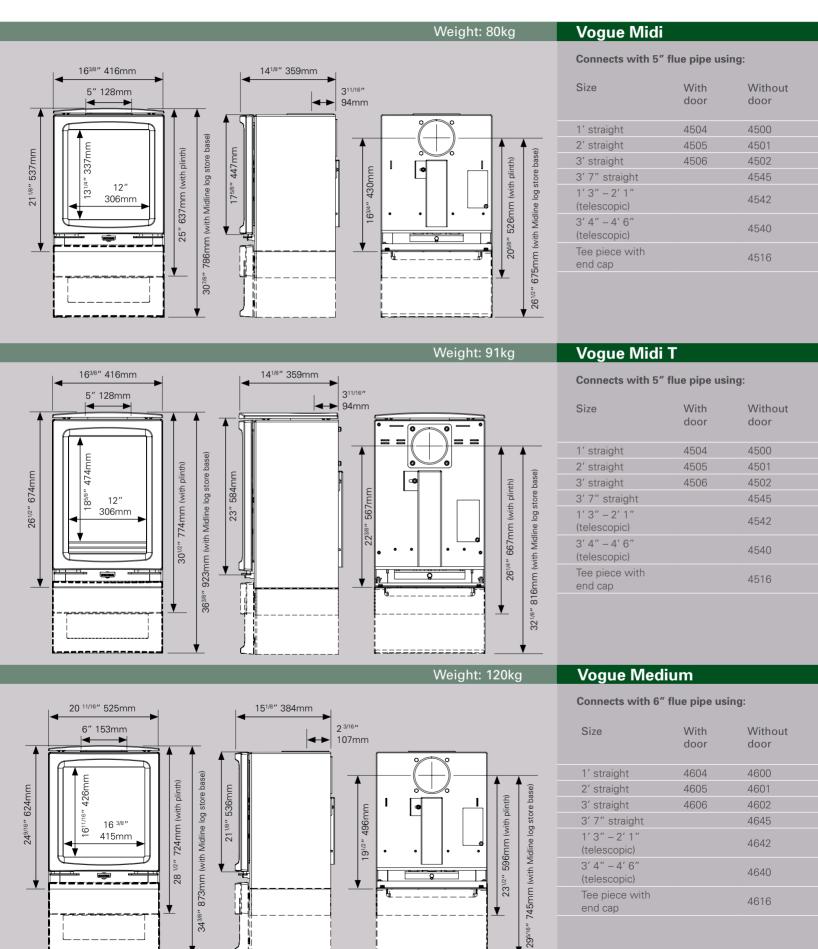


The flue pipe connects your stove to the existing/new chimney system. The chimney system must meet the requirements of Building Regulations (Document J) and the stove fitted in accordance with the detailed installation instructions provided with each unit. You may also download these instructions prior to purchase from **www.stovax.com**.


Vision Small


Connects with 5" flue pipe using:

| Size | With door | Without door |
|-------------------------------|--------------|-----------------|
| 1' straight | 4504 | 4500 |
| 2' straight | 4505 | 4501 |
| 3' straight | 4506 | 4502 |
| 3' 7" straight | | 4545 |
| 1' 3" - 2' 1" (telescopic) | | 4542 |
| 3' 4" - 4' 6" (telescopic) | | 4540 |
| Tee piece with end cap | | 4516 |

Weight: 57kg (Wood) / 72kg (Multi-fuel)









Vision Small T

Connects with 5" flue pipe using:

| Size | With door | Without door |
|-------------------------------|--------------|-----------------|
| 1' straight | 4504 | 4500 |
| 2' straight | 4505 | 4501 |
| 3' straight | 4506 | 4502 |
| 3' 7" straight | | 4545 |
| 1' 3" - 2' 1" (telescopic) | | 4542 |
| 3' 4" - 4' 6" (telescopic) | | 4540 |
| Tee piece with end cap | | 4516 |

Weight: 61.5kg







Vision Midi


Connects with 5" flue pipe using:


| Size | With door | Without door |
|-------------------------------|--------------|-----------------|
| 1' straight | 4504 | 4500 |
| 2' straight | 4505 | 4501 |
| 3' straight | 4506 | 4502 |
| 3' 7" straight | | 4545 |
| 1' 3" - 2' 1" (telescopic) | | 4542 |
| 3' 4" - 4' 6" (telescopic) | | 4540 |
| Tee piece with | | 4516 |

Weight: 65kg (Wood) / 92kg (Multi-fuel)







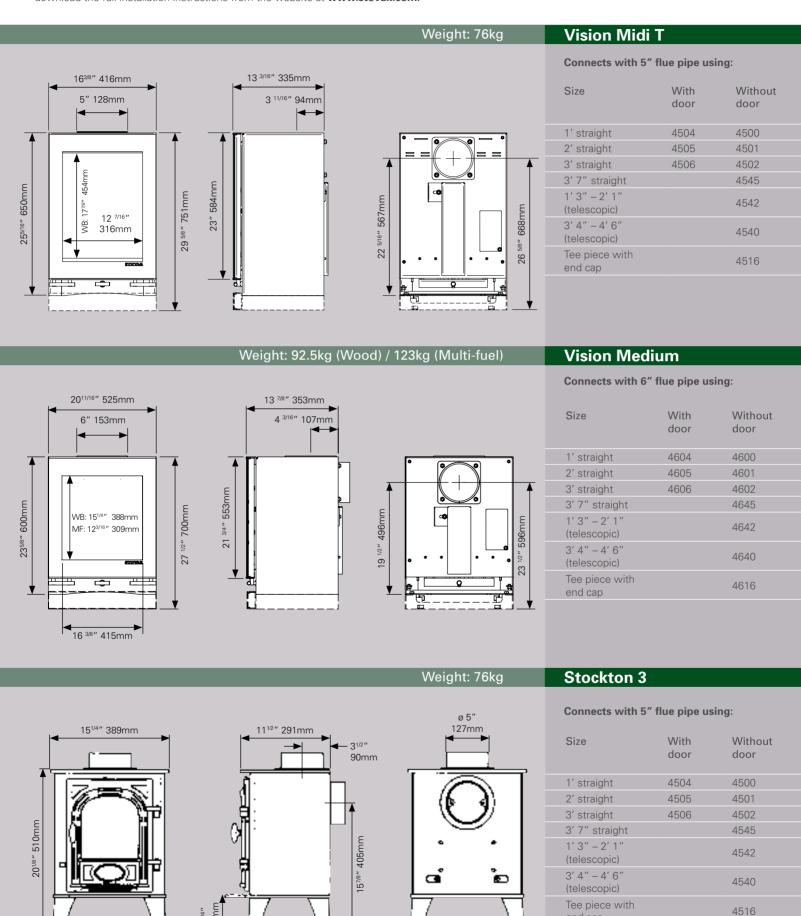

13^{1/4}" 338mm

end cap


The flue pipe connects your stove to the existing/new chimney system. The chimney system must meet the requirements of Building Regulations (Document J) and the stove fitted in accordance with the detailed installation instructions provided with each unit. You may also download these instructions prior to purchase from **www.stovax.com**.


Stockton 4


Connects with 5" flue pipe using:

| Size | With door | Without door |
|-------------------------------|--------------|-----------------|
| 1' straight | 4504 | 4500 |
| 2' straight | 4505 | 4501 |
| 3' straight | 4506 | 4502 |
| 3' 7" straight | | 4545 |
| 1' 3" - 2' 1" (telescopic) | | 4542 |
| 3' 4" - 4' 6" (telescopic) | | 4540 |
| Tee piece with end cap | | 4516 |

Weight: 83kg









Stockton 5


Connects with 5" flue pipe using:

| Size | With door | Without door |
|-------------------------------|--------------|-----------------|
| 1' straight | 4504 | 4500 |
| 2' straight | 4505 | 4501 |
| 3' straight | 4506 | 4502 |
| 3' 7" straight | | 4545 |
| 1' 3" - 2' 1" (telescopic) | | 4542 |
| 3' 4" - 4' 6" (telescopic) | | 4540 |
| Tee piece with end cap | | 4516 |
| | | |

Weight: 83kg - 90kg









Stockton 5 Midline

Connects with 5" flue pipe using:

| Size | With door | Without door |
|-------------------------------|--------------|-----------------|
| 1' straight | 4504 | 4500 |
| 2' straight | 4505 | 4501 |
| 3' straight | 4506 | 4502 |
| 3' 7" straight | | 4545 |
| 1' 3" - 2' 1" (telescopic) | | 4542 |
| 3' 4" - 4' 6" (telescopic) | | 4540 |
| Tee piece with end cap | | 4516 |

Weight: 100kg

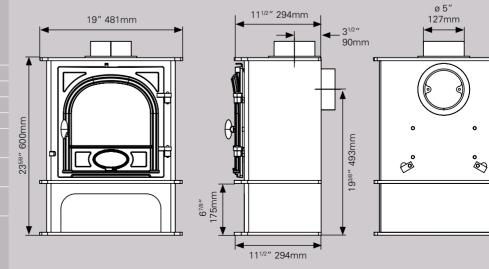

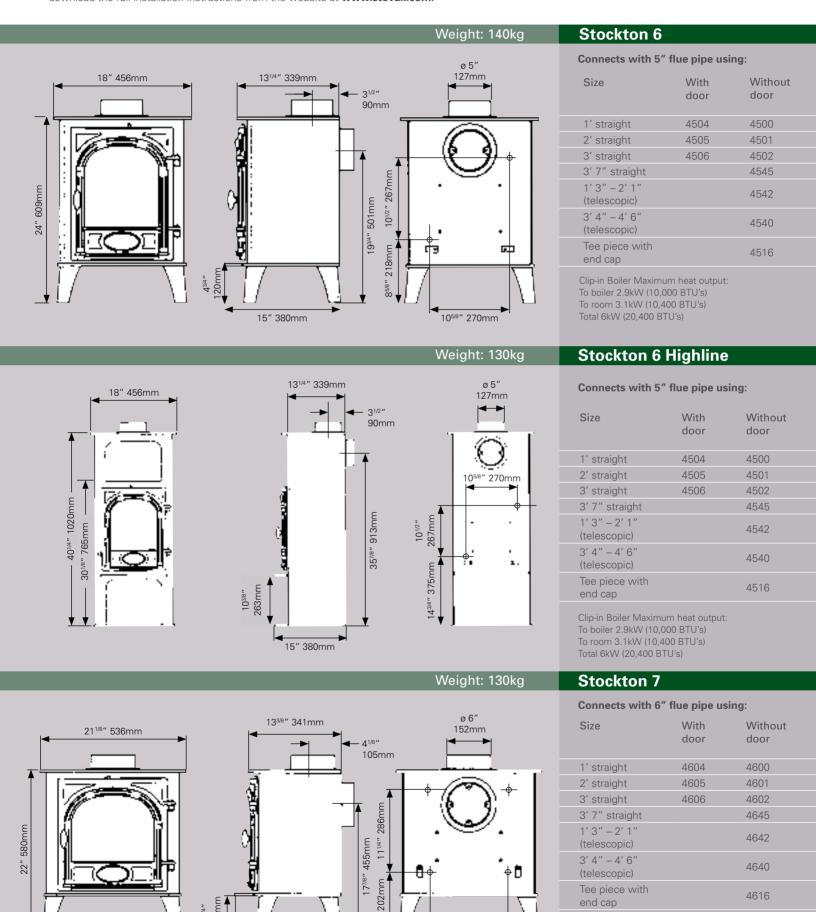

121mm

15^{1/4}" 385mm

4616

Tee piece with

Clip-in Boiler Maximum heat output: To boiler 3.5kW (12,000 BTU's)

To room 3.5kW (11,800 BTU's) Total 7kW (23,800 BTU's)

end cap


10^{1/4}" 259mm

Flue pipe connects your stove to the existing/new chimney system. The chimney system must meet the requirements of Building Regulations (Document J) and the stove fitted in accordance with the detailed installation instructions provided with each unit. You may also download these instructions prior to purchase from **www.stovax.com**.

Stockton 7 Inset Convector

Connects to register plate, flexible flue liner or flue pipe. See installation instructions.

Weight: 120kg

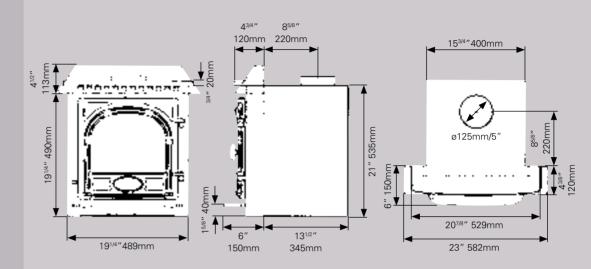


Stockton 7HB Inset Boiler

Connects to register plate, flexible flue liner or flue pipe. See installation instructions.

Maximum heat output: To boiler 7.4kW (25,200 BTU's) To room 4.0kW (13,600 BTU's) Total 11.4kW (38,800 BTU's)


Weight: 130kg

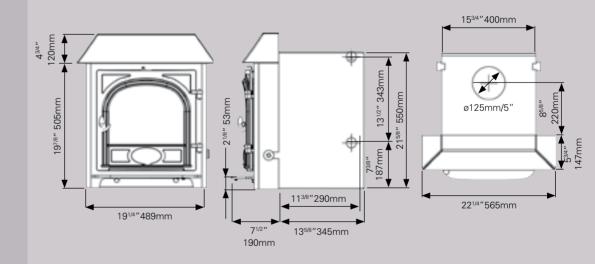



Stockton Milner


Fits into existing Milner fireback. See installation instructions.

Weight: 90kg

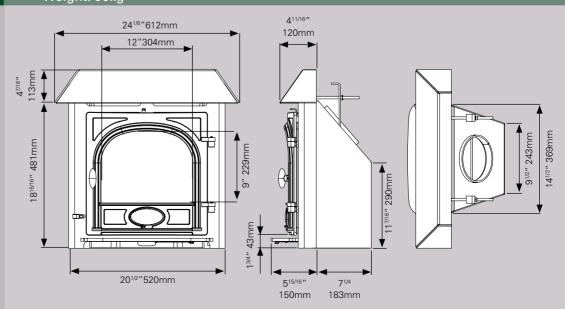

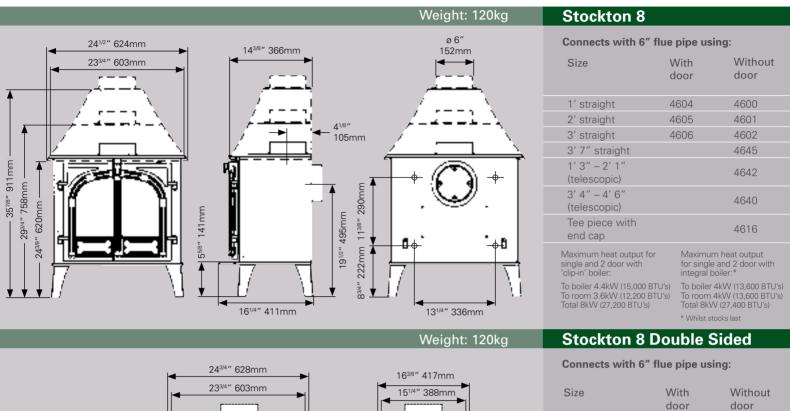






| Size | With | Without door |
|-------------------------------|------|-----------------|
| 1' straight | 4604 | 4600 |
| 2' straight | 4605 | 4601 |
| 3' straight | 4606 | 4602 |
| 3' 7" straight | | 4645 |
| 1' 3" - 2' 1" (telescopic) | | 4642 |
| 3' 4" - 4' 6" (telescopic) | | 4640 |
| Tee piece with end cap | | 4616 |
| | | |

Weight: 120kg

Stockton 8 Inset Convector

Connects to register plate, flexible flue liner or flue pipe. See installation instructions.

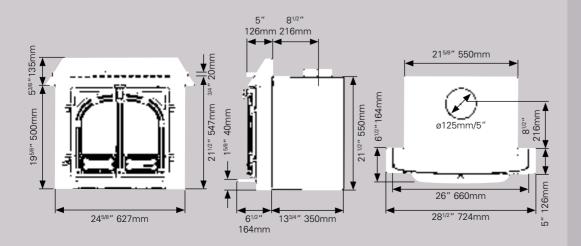

Flue pipe connects your stove to the existing/new chimney system. The chimney system must meet the requirements of Building Regulations (Document J) and the stove fitted in accordance with the detailed installation instructions provided with each unit. You may also download these instructions prior to purchase from **www.stovax.com**.


Stockton 8HB Boiler

Connects with 6" flue pipe using:

| Size | With door | Without door |
|-------------------------------|--------------|-----------------|
| 1' straight | 4604 | 4600 |
| 2' straight | 4605 | 4601 |
| 3' straight | 4606 | 4602 |
| 3' 7" straight | | 4645 |
| 1' 3" - 2' 1" (telescopic) | | 4642 |
| 3' 4" - 4' 6" (telescopic) | | 4640 |
| Tee piece with | | 4616 |

Maximum heat output: To boiler 8.2kW (28,000 BTU's) To room 4.9kW (16,700 BTU's) Total 13.1kW (44,700 BTU's)

Weight: 140kg

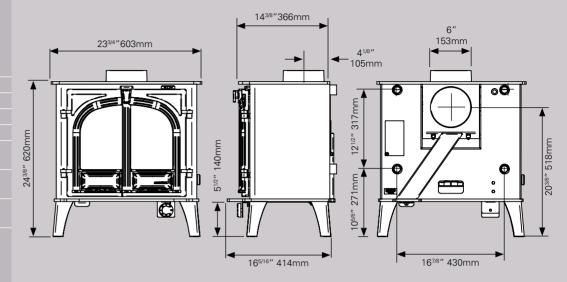


Stockton 11

Connects with 6" flue pipe using:

| Size | With door | Without door |
|-------------------------------|--------------|-----------------|
| 1' straight | 4604 | 4600 |
| 2' straight | 4605 | 4601 |
| 3' straight | 4606 | 4602 |
| 3' 7" straight | | 4645 |
| 1' 3" - 2' 1" (telescopic) | | 4642 |
| 3' 4" – 4' 6" (telescopic) | | 4640 |
| Tee piece with end cap | | 4616 |
| | | |

Clip-in Boiler
Maximum heat output for single and 2 door:
To boiler 7.1kW (24,000 BTU's)
To room 3.1kW (10,500 BTU's)
Total 10 2kW (34,500 BTU's)

Weight: 140kg

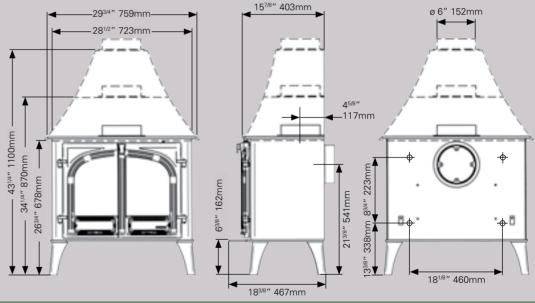



Stockton 11 Double Sided

Connects with 6" flue pipe using:

| Size | With door | Without door |
|-------------------------------|--------------|-----------------|
| 1' straight | 4604 | 4600 |
| 2' straight | 4605 | 4601 |
| 3' straight | 4606 | 4602 |
| 3' 7" straight | | 4645 |
| 1' 3" - 2' 1" (telescopic) | | 4642 |
| 3' 4" - 4' 6" (telescopic) | | 4640 |
| Tee piece with end cap | | 4616 |

Weight: 160kg - 175kg

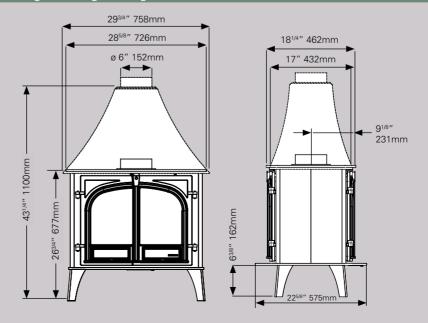

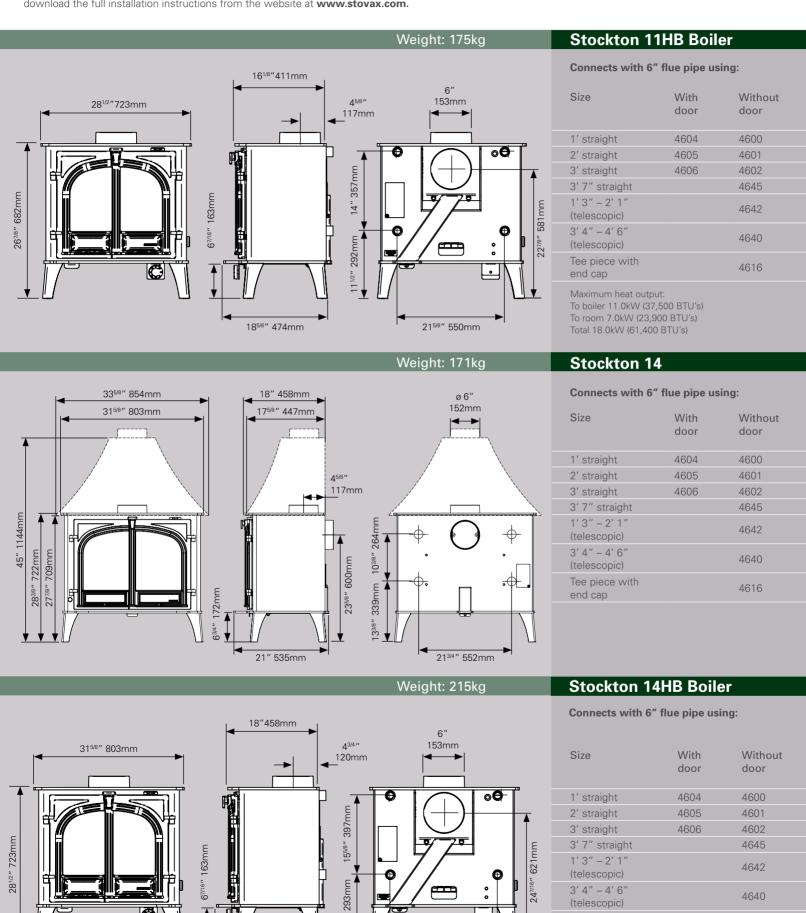

24^{3/4}" 630mm

20^{1/2}" 520mm

4616

Tee piece with

Maximum heat output: To boiler 15.0kW (51,200 BTU's)

To room 7.0kW (23,900 BTU's) Total 22.0kW (75,100 BTU's)

end cap


Flue pipe connects your stove to the existing/new chimney system. The chimney system must meet the requirements of Building Regulations (Document J) and the stove fitted in accordance with the detailed installation instructions provided with each unit. You may also download these instructions prior to purchase from **www.stovax.com**.

Riva Plus Small

Connects with 5" flue pipe using:

| Size | With door | Without door |
|-------------------------------|--------------|-----------------|
| 1' straight | 4504 | 4500 |
| 2' straight | 4505 | 4501 |
| 3' straight | 4506 | 4502 |
| 3' 7" straight | | 4545 |
| 1' 3" - 2' 1" (telescopic) | | 4542 |
| 3' 4" - 4' 6" (telescopic) | | 4540 |
| Tee piece with end cap | | 4516 |

Weight: 95kg

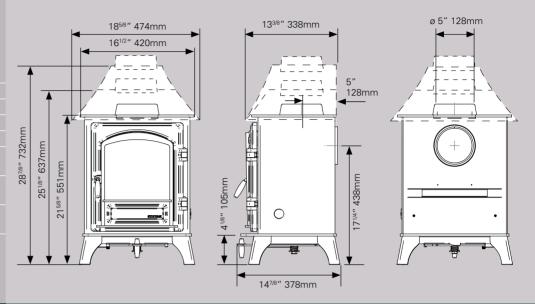


Riva Plus Midi

Connects with 5" flue pipe using:

| Size | With door | Without door |
|-------------------------------|--------------|-----------------|
| 1' straight | 4504 | 4500 |
| 2' straight | 4505 | 4501 |
| 3' straight | 4506 | 4502 |
| 3' 7" straight | | 4545 |
| 1' 3" - 2' 1" (telescopic) | | 4542 |
| 3' 4" - 4' 6" (telescopic) | | 4540 |
| Tee piece with end cap | | 4516 |

Weight: 113kg

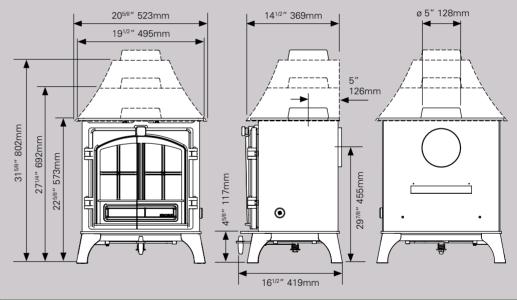



Riva Plus Medium

Connects with 5" flue pipe using:

| Size | With door | Without door |
|-------------------------------|--------------|-----------------|
| 1' straight | 4504 | 4500 |
| 2' straight | 4505 | 4501 |
| 3' straight | 4506 | 4502 |
| 3' 7" straight | | 4545 |
| 1' 3" - 2' 1" (telescopic) | | 4542 |
| 3' 4" - 4' 6" (telescopic) | | 4540 |
| Tee piece with | | 4516 |

Weight: 146kg

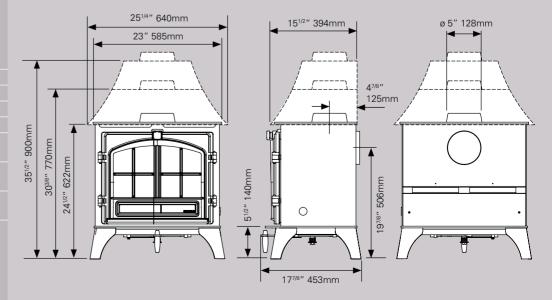

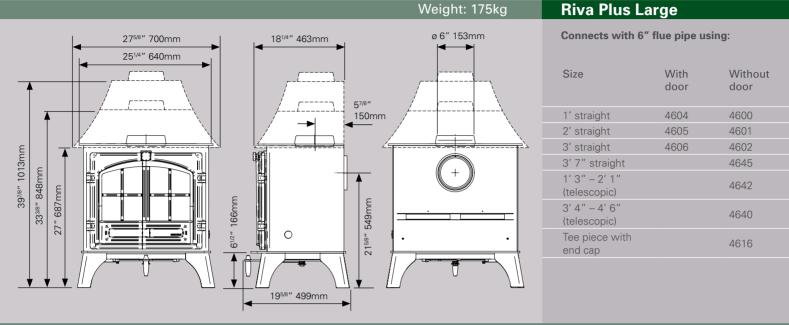


Riva, Studio and Elise Freestanding

For further product and technical information, including dimensions and drawings, on Stovax's Riva, Studio, and Elise Freestanding stoves (shown on pages 108 - 110), please see the separate dedicated brochures for these ranges. Alternatively you can visit www.stovax.com or speak to your local expert retailer for details.





Also available from the Stovax Group...



Stovax also offers a comprehensive range of stove & fireplace chimney systems, the Stovax Professional XQ™ collection. Crafted from 304L grade stainless steel for a durable outer finish, the fully sealed components offer water tight protection for the insulation within.

With innovative decorative options, the ability to specify a colour for your system and with a host of technical advancements such as their Twist-Lock system, the Professional XQ™ range provides an attractive, versatile and reliable solution for your flue system. Furthermore, the Professional XQ™ range carries a 10 year conditional warranty offering complete peace of mind.

> For further information or to request a brochure, simply contact your local retailer or visit www.stovax.com/chimneysystems.



Classic Fireplaces

Whether you want to restore a period house to its former glory or create an authentic look for a more modern home, you can be confident that Stovax's Classic Fireplaces take their inspiration from genuine 19th Century designs. We also pride ourselves on the fact that each remains an individual masterpiece, hand-cast to the same specification as Georgian and Victorian originals, and extensively finished to display a wealth of intricate detail.

Alternatively, we also offer fireplaces with the most up-to-date design to complement modern interiors. In several cases, Stovax have added a 21st Century slant to the design to make them even more appropriate to today's homes and lifestyles.

For further information or to request a brochure, simply contact your local retailer or visit www.stovax.com.



Details on the full range of products available and brochure PDF's can be found at the websites detailed above. Alternatively, you can scan this QR code or visit www.stovax.com to view our whole range of brochures.



Brochure Photography

All of the flame pictures shown in this brochure are taken from real fires. Please note however, that flame pictures will vary depending on the exact fuel used, flue conditions and surrounding geographical features. Given that building regulations are subject to change some of the photography in this brochure may not comply with the requirements of the latest Building Regulations and you should always check your proposed installation arrangement with your HETAS trained installer before proceeding and observe the minimum distance to combustible materials as stated in the installation instructions. Some of the installations in this brochure are dependant on the use of heat shields to reduce the required separation from combustible material.

Stovax gratefully acknowledges the assistance of the following companies with photographic settings:

Amtico - www.amtico.com; Ashore - 01392 477763; Beach Bros - www.beachbros.co.uk; Bradley Natural Stone Fireplaces - www.bnsp.co.uk; Carpet Right - www.carpetright.co.uk; Chandi Chowk - www.chandnichowk.co.uk; Chunky Monkey - www.chunkymonkeyfurniture.co.uk Debenhams - www.debenhams.com; Desenio - www.desenio.co.uk; Dingles - www.houseoffraser.co.uk; Easyart - www.easyart.com; Eclectique - www.eclectique.co.uk; Fagins Antiques - www.faginsantiques.com; Farmington Stone Fireplaces - www.farmington.co.uk; Furniture Village - www.furniturevillage.co.uk; Grace and Glory - www.graceandgloryhome.co.uk; Just Shutters - www.justshutters.co.uk; Laura Ashley - www.lauraashley.com; Moko - www.mokodirect.com; Next - www.next.co.uk; Opies Ltd - www.opiesuk.co.uk; Orange Tree - www.theorangetree.co.uk; Original Style - www.originalstyle.com; Rudloe Stone Fireplaces - www.rudloe-stone.com; The Prop Factory - www.propfactory.co.uk; Toby's Antiques - www.tobysreclaimation.co.uk; Triton Galleries - www.tritongalleries.co.uk; Woofenden Construction - www woofenden com





STOVAX

Fire Your Imagination













Your Stovax retailer:

£4.00



Stovax Limited

Falcon Road, Sowton Industrial Estate, Exeter, Devon, England EX2 7LF

Trade sales Export sales Other depts Tel: 01392 474000 Tel: 00 44 1392 261990

Tel: 01392 474011 Fax: 01392 219932

Email: info@stovax.com



To view & download our complete range of brochures, simply scan this code or visit www.stovax.com

A member of the Stovax Group

www.stovax.com





